

APP CRS
309°

Rwy Ldg
TDZE
1715

Apt Elev
1723

RNAV (GPS) RWY 31

CHAUTAUQUA COUNTY/JAMESTOWN (JHW)


RNP APCH-GPS

▼
NA

Straight-In Rwy 31 NA at night, Circling Rwy 13, 31 NA at night. When local altimeter setting not received, use DKK altimeter setting and increase all MDAs 200 feet and LNAV visibility Cat C ¾ SM, LNAV visibility Cat D ½ SM, and Circling visibility Cats C/D ¾ SM. Rwy 31 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 4000 direct CRYST WP and hold.

AWOS-3PT 118.425	BUFFALO APP CON ★ 126.05	UNICOM 122.975 (CTAF) 0
---------------------	-----------------------------	----------------------------

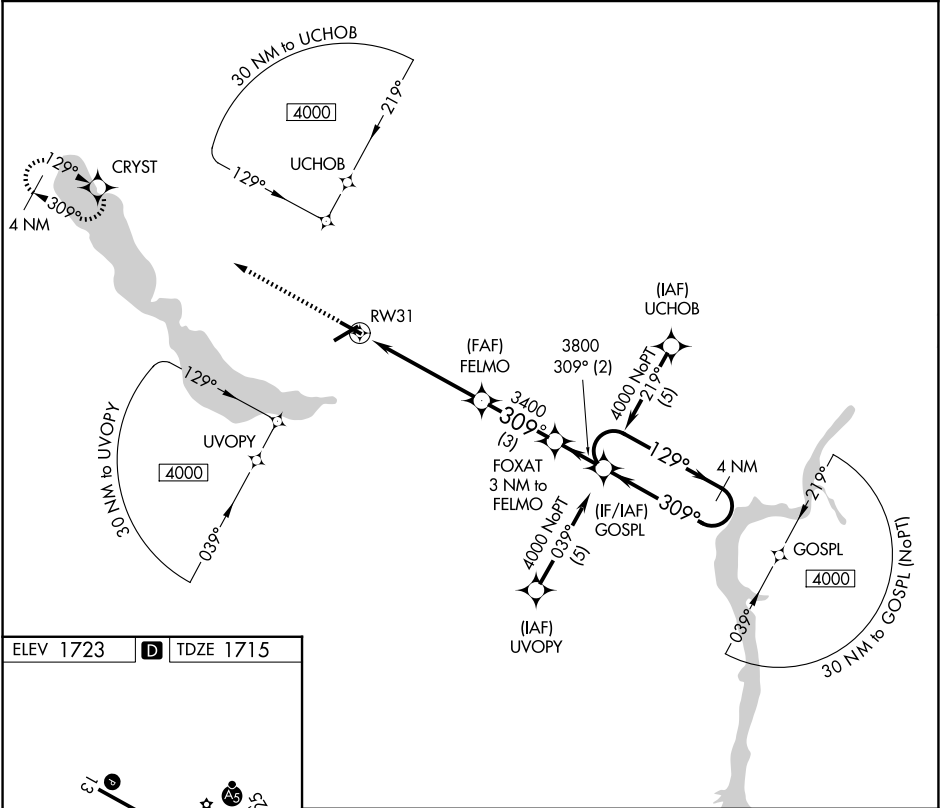

ELEV 1723 D TDZE 1715

4000 CRYST

FOXAT 3 NM to FELMO

GOSPL

4 NM Holding Pattern

RW31

FELMO

3400

3800

4000

CATEGORY	A	B	C	D
LNAV MDA	2200-1	485 (500-1)	2200-1⅓ 485 (500-1⅓)	2200-1½ 485 (500-1½)
CIRCLING	2200-1	477 (500-1)	2260-1½ 537 (600-1½)	2340-2 617 (700-2)