

LOC I-TYV 109.9	APCH CRS 252°	Rwy Idg 12,001 TDZE 301 Arpt Elev 312
---------------------------	-------------------------	--

[USAF]

LITTLE ROCK AFB (KLRF)

RNP APCH. RNAV1 - GPS or RADAR required.

V *When TDZL/CL inop, increase RVR to 24. RVR 18 still authorized with use of FD, AP, or HUD to DA.
When ALS inop, increase RVR to 40, vis to ¾ mile.
** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1½ miles.
*** Circling not authorized S of Rwy 7-25.
Circling not authorized to Assault Strip.


ALSF-2



MISSED APPROACH: Climb to 900 then climbing right turn to 3000 direct HERCK and hold as published.

ALTERNATE MISSED APPROACH: Climbing to 3000 fly runway heading until LRF 2 DME, then turn right heading 360°, EFC from ATC.

ATIS ★ 119.175 251.1	APP/DEP CON 119.5 306.2	TOWER 120.6 269.075	GND CON 132.8 275.8
-------------------------	----------------------------	------------------------	------------------------

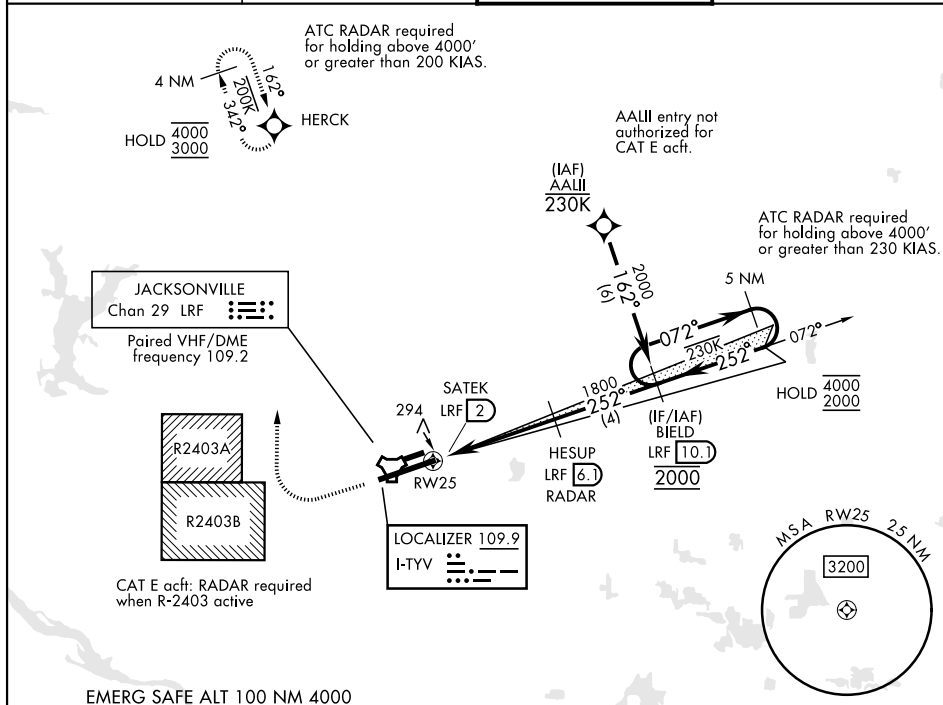

CATEGORY	A	B	C	D	E
S-ILS 25*	501/18		200 (200-½)		
S-LOC 25**	760/24	459 (500-½)	760/45 459 (500-¾)		
CIRCLING***	780-1 468 (500-1)	920-1 608 (700-1)	920-1¼ 608 (700-1¾)	1040-2¼ 728 (800-2¼)	NOT AUTHORIZED

Diagram details: 900, 3000, HERCK, 5 NM Holding Pattern, BIELD LRF 10.1, 072°, 252°, 4000, 2000, 2000, 1800, GS 3.00°, TCH 55, 0.5 NM, 4.1 NM, SATEK LRF 2.8, HESUP LRF 6.1 RADAR, ASSAULT STRIP 072°-0.4% L/R 3361 x 60, 12,001 x 150, TWR, A1, P, 252°, 252°, 252°.