RNAV (GPS) RWY 16

ADDISON (ADS)

WAAS CH 82202 W16A	APP CRS 157°	Rwy Ldg 6224 / TDZE 644 / Apt Elev 645

RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 16 helicopter visibility reduction below 1 SM NA. Inop table does not apply to LPV all Cats, and LNAV Cats A/B. For inop ALS, increase LNAV/VNAV all Cats visibility to 1¼ SM, and LNAV Cats C/D to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct VEYXE and on track 076° to TRISS and hold.

ATIS	LONE STAR APP CON	ADDISON TOWER ★	GND CON	UNICOM
133.4	124.3 282.275	126.0 (CTAF) L 239.0	121.6	122.95

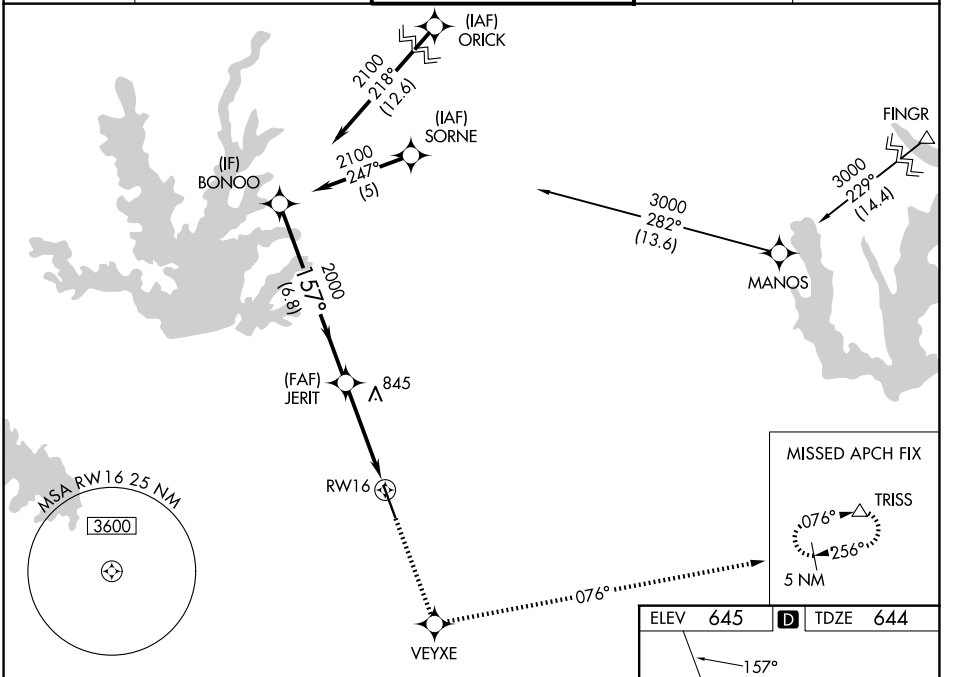

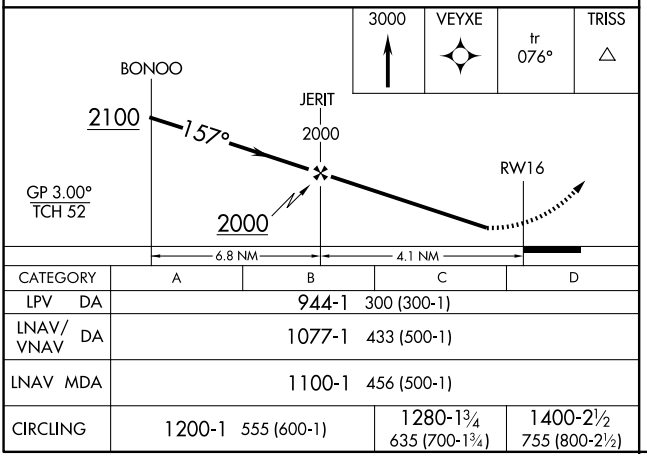

CATEGORY	A	B	C	D
LPV DA	944-1	300 (300-1)		
LNAV/VNAV DA	1077-1	433 (500-1)		
LNAV MDA	1100-1	456 (500-1)		
CIRCLING	1200-1 555 (600-1)		1280-1¾ 635 (700-1¾)	1400-2½ 755 (800-2½)

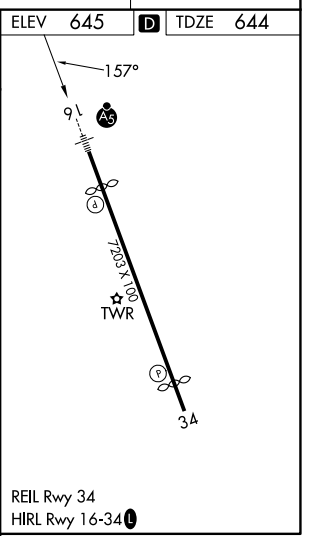

REIL Rwy 34
HIRL Rwy 16-34 L

SC-2, 03 SEP 2026 to 01 OCT 2026
SC-2, 03 SEP 2026 to 01 OCT 2026