
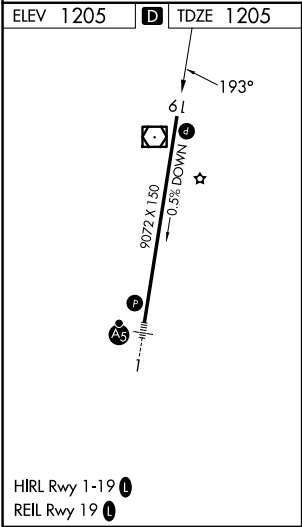


WAAS CH 86616 W19A	APP CRS 193°	Rwy Ldg TDZE Apt Elev	9072 1205 1205
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 19
MARQUETTE/SAWYER RGNL (SAW)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.			MISSED APPROACH: Climb to 3500 direct EVYIP and hold.	
AWOS-3PT 118.375	MINNEAPOLIS CENTER 119.1 290.2	SAWYER TOWER ★ 119.975 (CTAF) 0	GND CON 121.65	UNICOM 122.7

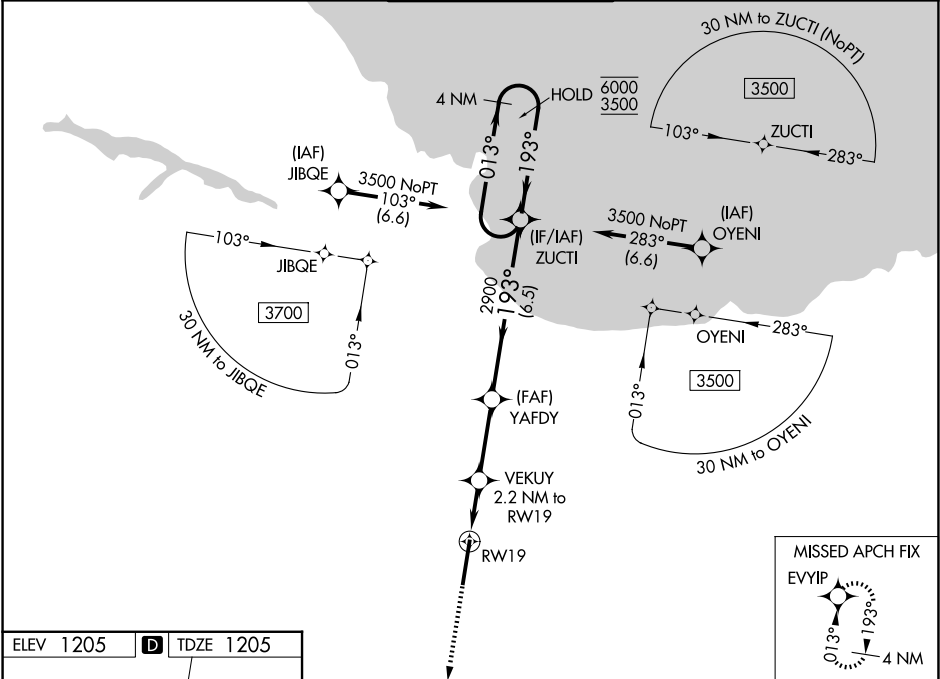

ELEV 1205 D TDZE 1205		3500 EVYIP VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 53).		ZUCTI 4 NM Holding Pattern	
193°		VEKUY 2.2 NM to RW19		YAFDY 2900	
61		1.6 NM to RW19		193°	
9072 X 150		1.6 NM		6000	
0.5% DOWN		0.6 NM		3500	
A5		2.9 NM		GP 3.00°	
T		6.5 NM		TCH 60	
CATEGORY	A	B	C	D	
LPV DA	1405- ³ / ₄ 200 (200- ³ / ₄)				
LNAV/VNAV DA	1522- ⁷ / ₈ 317 (400- ⁷ / ₈)				
LNAV MDA	1620-1	415 (500-1)	1620-1 ¹ / ₈	415 (500-1 ¹ / ₈)	
CIRCLING	1680-1	475 (500-1)	1820-1 ³ / ₄	1820-2	
			615 (700-1 ³ / ₄)	615 (700-2)	

EC-1, 03 SEP 2026 to 01 OCT 2026

EC-1, 03 SEP 2026 to 01 OCT 2026