RNAV (GPS) RWY 17

COX FLD (PRX)

WAAS	APP CRS	Rwy Ldg	6002
CH 69401	175°	TDZE	541
W17A		Apt Elev	548

RNP APCH - GPS.

Baro-VNAV and VDP NA when using SLR altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. When local altimeter setting not received, use SLR altimeter setting and increase LPV DA to 868 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1016 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 2200 direct CUKBO and hold.

AWOS-3PT	FORT WORTH CENTER	UNICOM
119.675	124.875 370.95	122.975 (CTAF) L

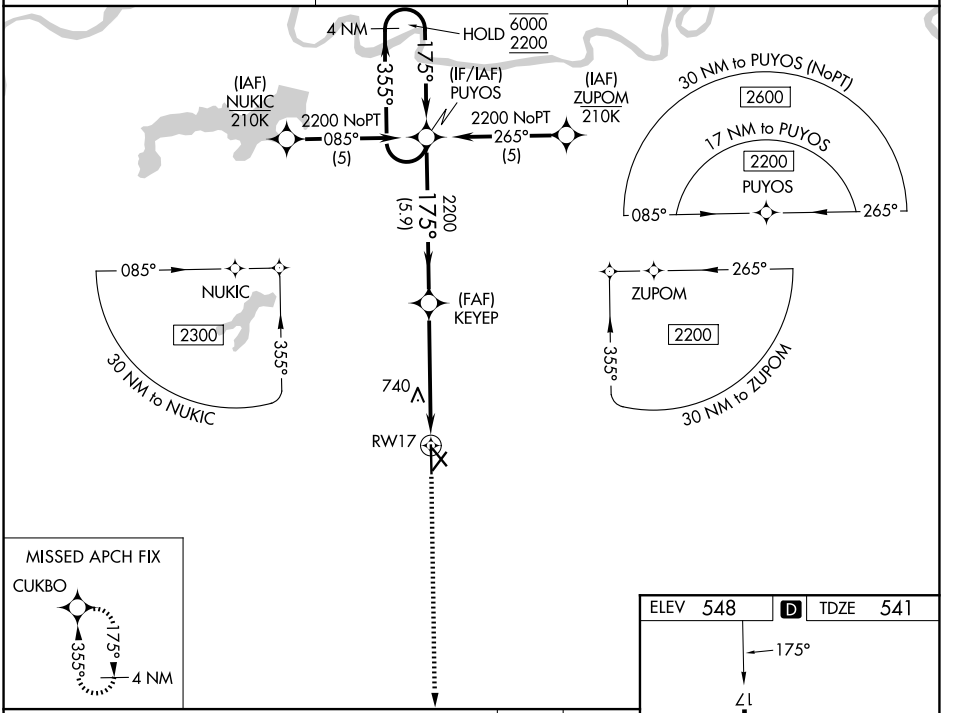

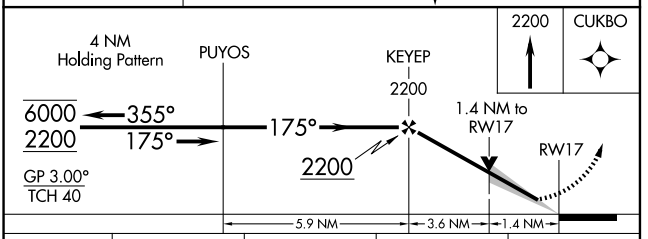

CATEGORY	A	B	C	D
LPV DA		791-¾	250 (300-¾)	
LNAV/VNAV DA		939-1⅛	398 (400-1⅛)	
LNAV MDA	1040-1	499 (500-1)	1040-1⅜	499 (500-1⅜)
CIRCLING	1060-1	512 (600-1)	1100-1½ 552 (600-1½)	1220-2¼ 672 (700-2¼)

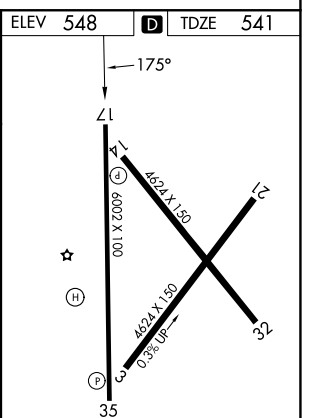

MIRL Rwy 17-35 L

SC-2, 03 SEP 2026 to 01 OCT 2026
SC-2, 03 SEP 2026 to 01 OCT 2026