

APP CRS
233°

Rwy Ldg
TDZE
931

Apt Elev
947

RNAV (RNP) Z RWY 23
WEST VIRGINIA INTL YEAGER (CRW)

▼

▲


For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ SM.

ALSF-1

Ⓐ1

MISSED APPROACH:
Climb to 4000 on track 233° to CITMA and hold.

ATIS 127.6	CHARLESTON APP CON 124.1 269.125	CHARLESTON TOWER 125.7 257.8	GND CON 121.8 348.6
----------------------	--	--	-------------------------------

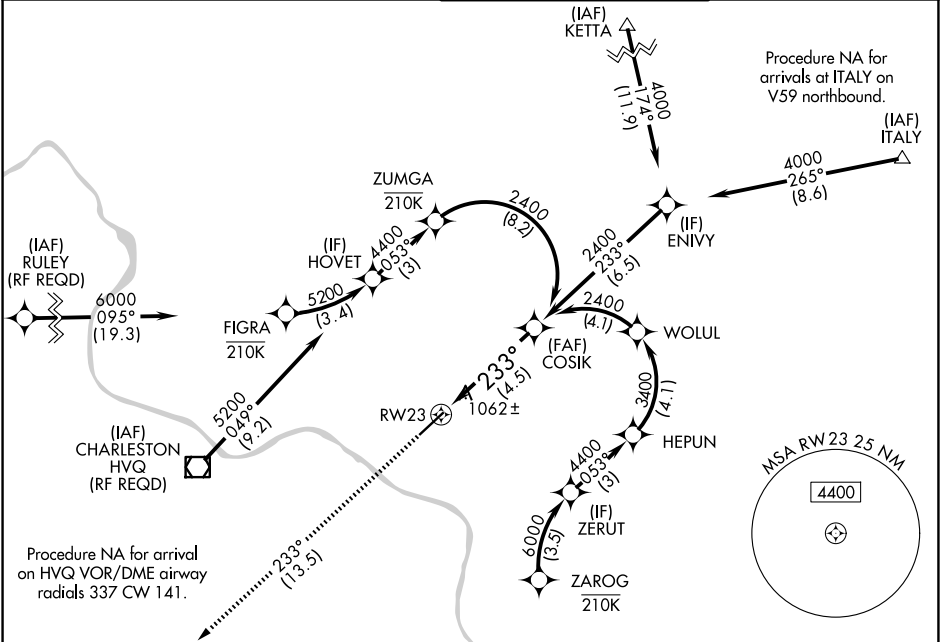

ELEV 947 **D** TDZE 931

4000

tr 233°

CITMA

See planview for multiple IF locations.

RW23

233°

2400

GP 3.00°

TCH 56

4.5 NM

6000

359°

(1.1.3)

(IAF) SCRIB (RF REQD)

6000

095°

(19.3)

(IAF) RULEY (RF REQD)

6000

053°

(13.5)

CITMA

6000

053°

(13.5)

ZAROG 210K

6000

053°

(13.5)

(IF) ZERUT

6000

053°

(13.5)

(IF) HEPUN

6000

053°

(13.5)

(IF) WOLUL

6000

053°

(13.5)

(IF) ENIVY

6000

053°

(13.5)

(IF) HOVET

6000

053°

(13.5)

(IF) FIGRA

6000

053°

(13.5)

(IAF) CHARLESTON HVQ (RF REQD)

6000

053°

(13.5)

(IAF) KETTA

6000

053°

(13.5)

(IAF) ITALY

4000

tr 233°

CITMA

See planview for multiple IF locations.

RW23

233°

2400

GP 3.00°

TCH 56

4.5 NM

CATEGORY	A	B	C	D
RNP 0.30 DA	1419/60	488 (500-1¼)		

AUTHORIZATION REQUIRED

HIRL Rwy 5-23

REIL Rwy 5