

WAAS
CH **87115**
W05A


APP CRS
053°

Rwy Ldg
TDZE **947**
Apt Elev **947**

RNAV (GPS) Y RWY 5

WEST VIRGINIA INTL YEAGER (CRW)

RNP APCH. For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C.		MISSED APPROACH: Climb to 3000 direct ENIVY and hold.	
ATIS 127.6	CHARLESTON APP CON 124.1 269.125	CHARLESTON TOWER 125.7 257.8	GND CON 121.8 348.6

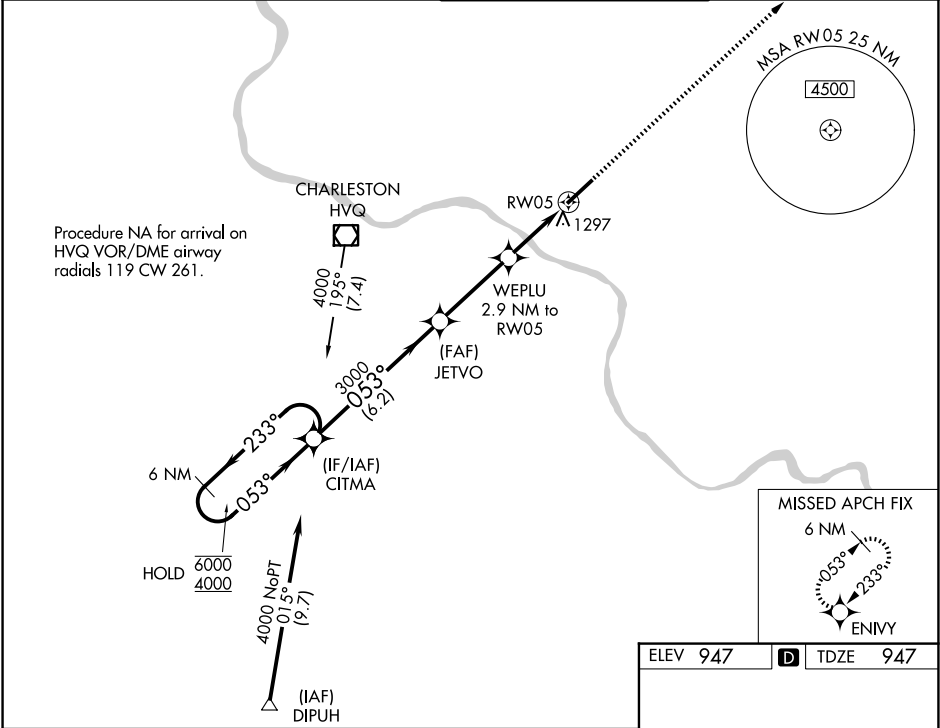

6 NM Holding Pattern CITMA		3000 ENIVY	
6000 ← 233° 4000 → 053°		* LNAV only	
GP 3.00° TCH 56		* 1.7 NM to RW05	
6.2 NM		1.2 NM	
CATEGORY	A	B	C
LPV DA	1147/40		200 (200-¾)
LNAV/VNAV DA	1584-1¾		637 (700-1¾)
LNAV MDA	1560/55	613 (700-1)	1560-1¾ 613 (700-1¾)
CIRCLING	1600-1	653 (700-1)	1760-2½ 813 (900-2½) 1880-3 933 (1000-3)

ELEV 947 D TDZE 947

6715 x 150

0.8% UP

TWR

053°