ILS or LOC RWY 4R

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)

LOC/DME I-TYN	APP CRS	Rwy Ldg	8000
110.9	036°	TDZE	39
Chan 46		Apt Elev	41

DME required for procedure entry and for LOC only.

Rwy 4R helicopter visibility reduction below 1 SM NA. Circling to Rwy 4L, 11, and 22R NA at night. Rwy 4R Straight-in and Circling minimums NA at night. When local altimeter setting not received, use ARA altimeter setting and increase S-ILS 4R DA to 350 feet, increase all MDAs 40 feet and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 2000 on LFT VORTAC R-035 to BEDDY INT/LFT 18.9 DME and hold.

ATIS	LAFAYETTE APP CON★	LAFAYETTE TOWER★	GND CON	UNICOM
134.05	121.1 363.0	118.5 (CTAF) 257.8	121.8	122.95

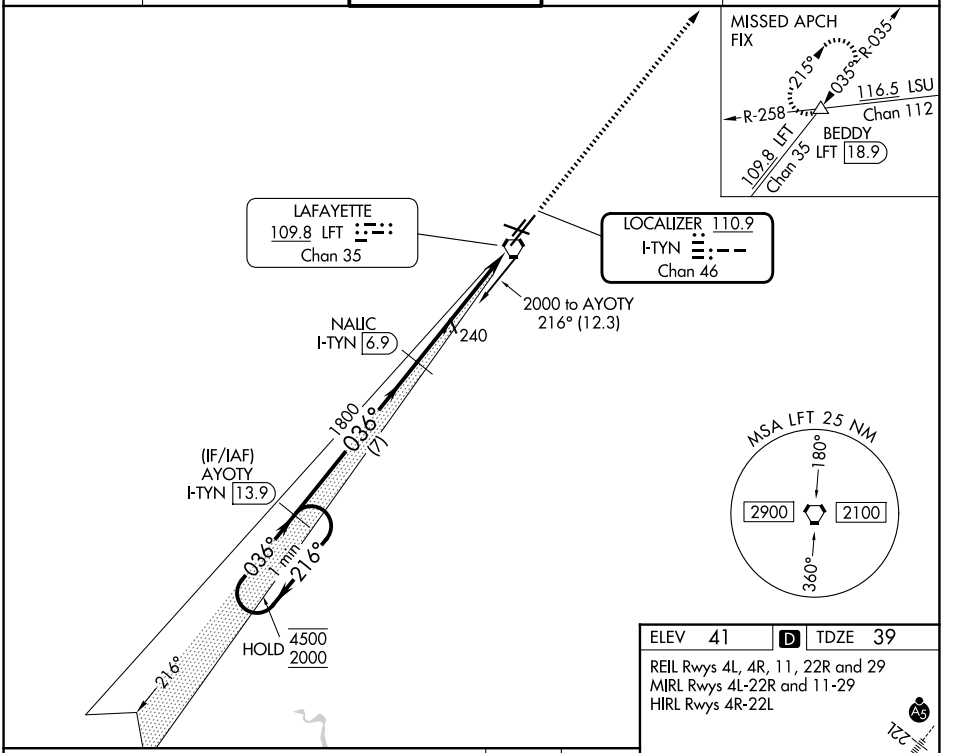

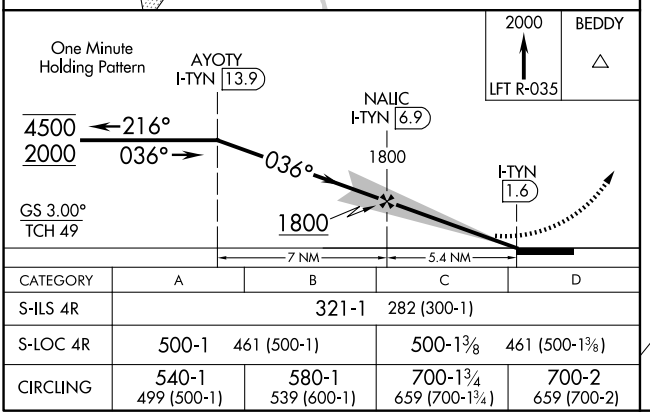

CATEGORY	A	B	C	D
S-ILS 4R	321-1		282 (300-1)	
S-LOC 4R	500-1	461 (500-1)	500-1⅜	461 (500-1⅜)
CIRCLING	540-1	580-1	700-1¾	700-2
	499 (500-1)	539 (600-1)	659 (700-1¾)	659 (700-2)

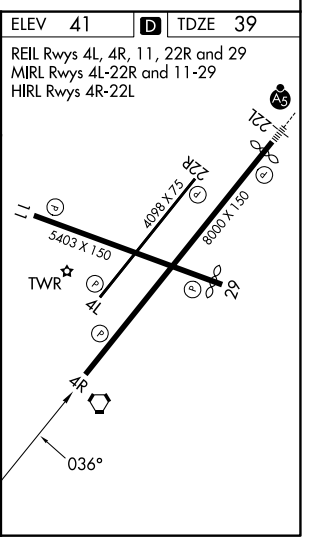

SC-4, 03 SEP 2026 to 01 OCT 2026
SC-4, 03 SEP 2026 to 01 OCT 2026