

VORTAC TWF	APP CRS	Rwy Ldg	8704
113.1	248°	TDZE	4154
Chan 78		Apt Elev	4154

VOR RWY 26
JOSLIN FLD/MAGIC VALLEY RGNL (TWF)


⚠ Night landing: Rwy 30 NA. VDP NA with Jerome altimeter setting. When local altimeter setting not received, use Jerome altimeter setting and increase all MDA 60 feet; increase S-26 Cat A visibility ¼ mile, Cat C/D ½ mile, Circling Cat C ¼ mile, and XULXU FIX S-26 Cat C/D ½ mile. For inop MALSR, increase S-26 Cat C/D visibility to 2½ miles; when using Jerome altimeter setting increase XULXU FIX S-26 Cat C/D visibility to 1½ mile.

MALSR



MISSED APPROACH: Climb to 6000 on TWF VORTAC R-248 then right turn direct TWF VORTAC and hold.

ASOS 135.025	TWIN FALLS APP CON* 126.7 353.75	TWIN FALLS TOWER* 118.2 (CTAF) 317.5	GND CON 121.7	UNICOM 122.95
-----------------	-------------------------------------	---	------------------	------------------

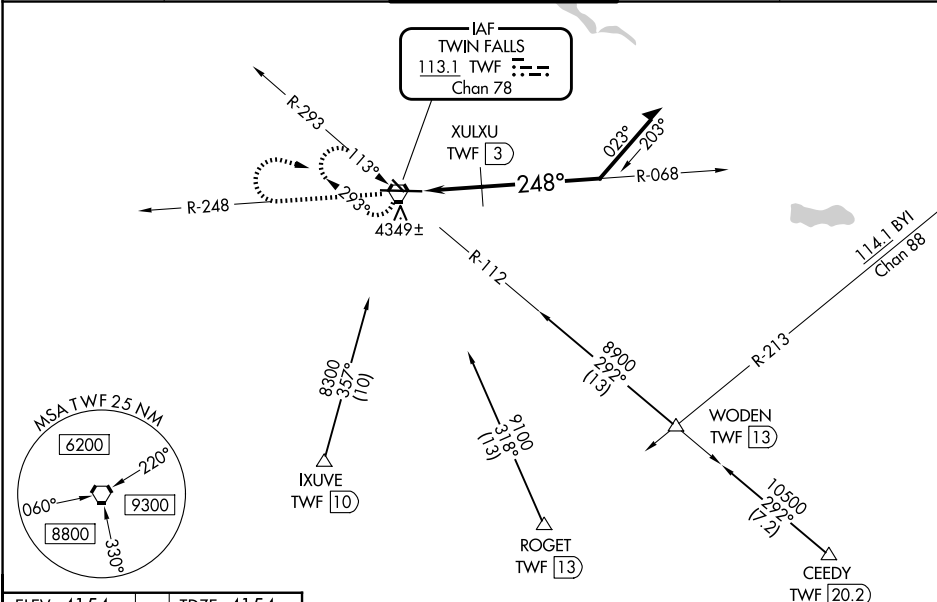

ELEV 4154 TDZE 4154



TWF VORTAC

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 55).

Remain within 10 NM

068° 248°

6000 10000 5000

1.2 NM 0.9 NM

TWR 3224X.75 1350 26

REIL Rwy 8 1

HIRL Rwy 8-26 1

CATEGORY	A	B	C	D
S-26	5000-½ 846 (900-½)	5000-¾ 846 (900-¾)	5000-1⅞ 846 (900-1⅞)	846 (900-1⅞)
CIRCLING	5000-1¼ 846 (900-1¼)	5100-2¾ 946 (1000-2¾)	5100-3 946 (1000-3)	5100-3 946 (1000-3)
XULXU FIX MINIMUMS				
S-26	4600-½ 546 (600-½)	446 (500-½)	4600-⅞ 946 (1000-⅞)	446 (500-⅞)
CIRCLING	4700-1 546 (600-1)	4780-1 626 (700-1)	5100-2¾ 946 (1000-2¾)	5100-3 946 (1000-3)

NW-1, 03 SEP 2026 to 01 OCT 2026

NW-1, 03 SEP 2026 to 01 OCT 2026