

WAAS
CH **86902**
W24A

APP CRS
241°

Rwy Idg
TDZE **16**
Apt Elev **18**

RNAV (GPS) RWY 24

BOWERMAN FLD (HQM)

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 43°C (109°F). When local altimeter setting not received, procedure NA. Circling NA northwest of Rwy 6-24. DME/DME RNP-0.3 NA. For inoperative MALSR, increase LPV Cat C visibility to ¾ mile and LNAV Cat C visibility to 2½ miles.


MALSR



MISSED APPROACH:

Climb to 2600 direct ZUNAD and hold.

ASOS 135.775	SEATTLE CENTER 128.3 269.0	UNICOM 122.7 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

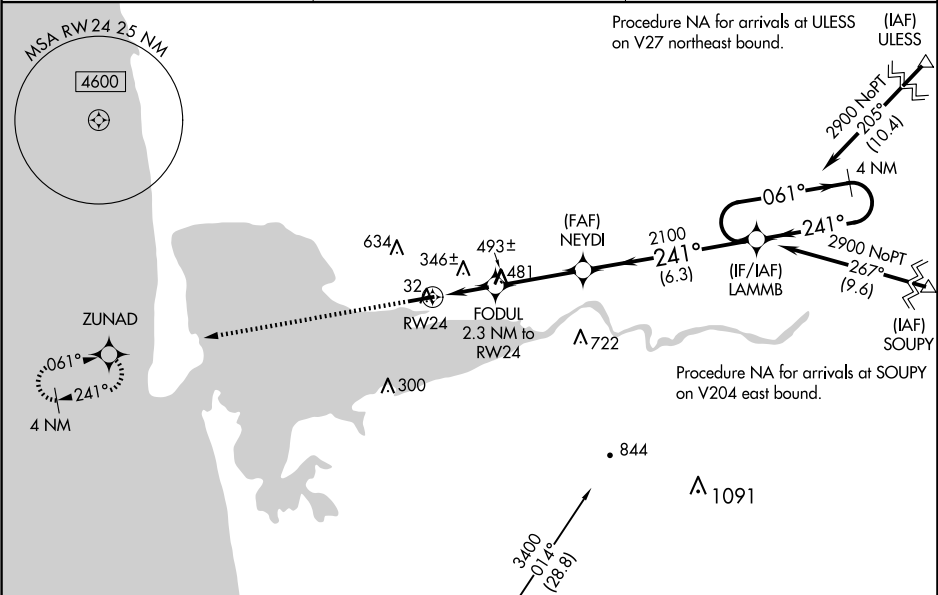

Procedure NA for arrivals at ULESS on V27 northeast bound. (IAF) ULESS

Procedure NA for arrivals at SOUPY on V204 east bound. (IAF) SOUPY

Procedure NA for arrivals at PUGIC on V27 southeast bound.

MSA RW24 25 NM
4600


ZUNAD
061°
241°
4 NM

634
346±
493±
32
RW24
FODUL
2.3 NM to RW24
Λ 300
Λ 722
(FAF) NEYDI
2100
241°
(6.3)
(IF/IAF) LAMMB
061°
241°
2900 NoPT
203°
(170.4)
4 NM
267°
(9.6)
(IAF) SOUPY

844
Λ 1091
3400
0145
(128.6)
PUGIC

ELEV 18

TDZE 16



REIL Rwy 6 0

HIRL Rwy 6-24 0

2600 ZUNAD

* LNAV Only.

RW24

FODUL
2.3 NM to RW24

NEYDI
2100

LAMMB

4 NM Holding Pattern

061° → 2900

← 241°

GP 3.50°
TCH 55

2.3 NM

3.2 NM

6.3 NM

CATEGORY	A	B	C	D
LPV DA	226-½	210 (300-½)	286-½ 270 (300-½)	NA
LNAV/VNAV DA	676-1½		660 (700-1½)	NA
LNAV MDA	800-½ 784 (800-½)	800-¾ 784 (800-¾)	800-1¾ 784 (800-1¾)	NA
CIRCLING	800-1 782 (800-1)	800-1¼ 782 (800-1¼)	800-2¼ 782 (800-2¼)	NA

HOQUIAM, WASHINGTON

46°58'N-123°56'W

BOWERMAN FLD (HQM)

Amdt 2E 07OCT21

RNAV (GPS) RWY 24