

WAAS CH 53723 W10A	APP CRS 101°	Rwy Idg TDZE Apt Elev	6003 74 85
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 10
MILLVILLE MUNI (MIV)

RNP APCH-GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Atlantic City altimeter setting; increase LPV DA to 330 feet; LNAV/VNAV DA to 571 feet and visibility ¼ SM; increase all MDAs 60 feet and visibility Cat C and D ¼ SM. Baro-VNAV and VDP NA when using Atlantic City altimeter setting. For inop MALSR when using Atlantic City altimeter setting, increase LNAV/VNAV all Cat visibility to 1⅝.

MALSR



MISSED APPROACH: Climb to 2000 direct ZIMDO and on track 128° to AZXEW and hold.

ASOS 119.6	ATLANTIC CITY APP CON 124.6 327.125	UNICOM 123.0 (CTAF) 0
----------------------	---	---------------------------------

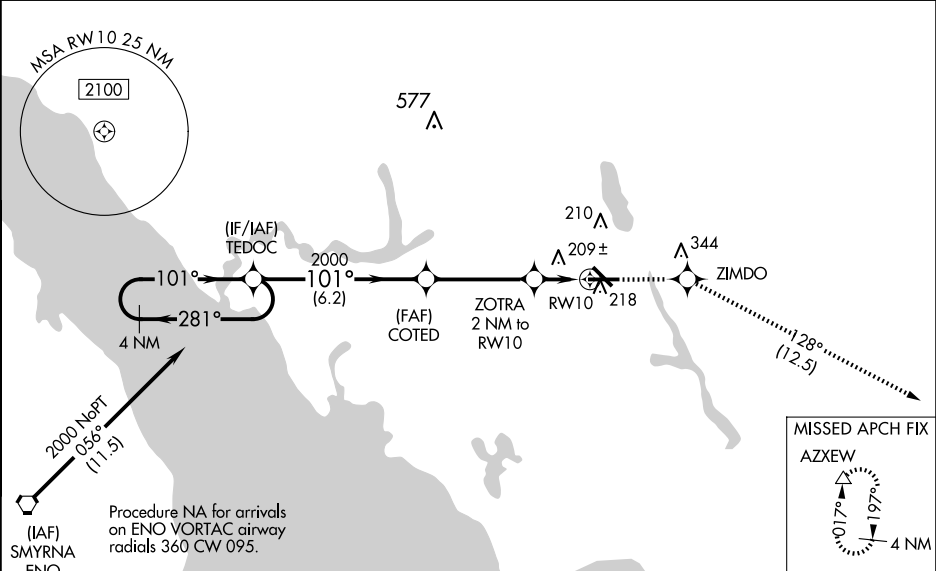

ELEV 85		TDZE 74	
4 NM Holding Pattern		2000 ZIMDO tr 128° AZXEW	
TEDOC		COTED	
2000 ← 281° 101° → 2000		2000	
GP 3.00° TCH 52		ZOTRA 2 NM to RW10 1.1 NM to RW10	
6.2 NM		3.9 NM	
0.9 NM		1.1 NM	
CATEGORY	A	B	C
LPV DA	274-1½	200 (200-1½)	
LNAV/VNAV DA	515-1	441 (500-1)	
LNAV MDA	460-1½ 386 (400-1½)	460-5/8 386 (400-5/8)	
CIRCLING	520-1 435 (500-1)	580-1 495 (500-1)	660-1½ 575 (600-1½) 660-2 575 (600-2)

MIRL Rwy 10-28 and 14-32 0