


LOC/DME I-GAD 108.35 Chan 20 (Y)	APP CRS 244°	Rwy Ldg 6802 TDZE 560 Apt Elev 569	ILS or LOC RWY 24 NORTHEAST ALABAMA RGNL (GAD)
--	------------------------	---	---

▼ DME required. VDP NA when using Annonisn altimeter setting. When local altimeter setting not received, use Annonisn altimeter setting and increase DA to 845 feet and all visibilities ¼ SM: increase all MDAs 80 feet and visibility S-LOC Cats C and D ¼ SM and Circling Cat C ½ SM.

▲ MISSED APPROACH: Climb to 3600 on GAD VOR/DME R-231 to STAMP/GAD 10 DME and hold, continue climb-in-hold to 3600.

AWOS-3PT 127.825	BIRMINGHAM APP CON 125.45 279.65	CLNC DEL 120.05 257.7	UNICOM 122.725 (CTAF) 0
----------------------------	--	---------------------------------	--

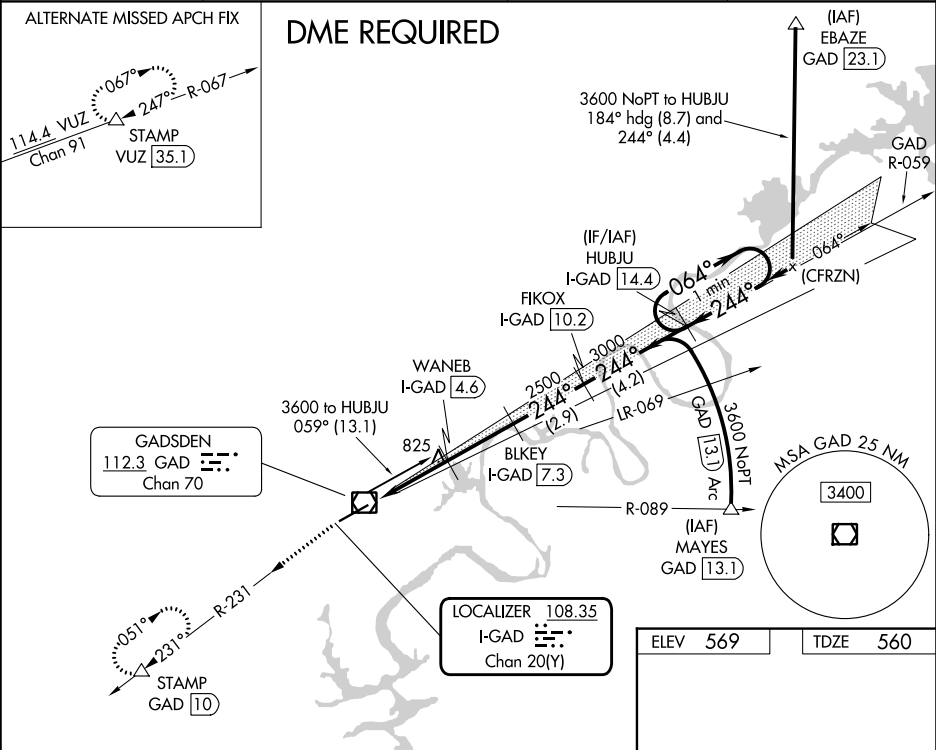

3600 ↑ GAD R-231	STAMP △	Use I-GAD DME when on the localizer course.	HUBJU I-GAD 14.4
*LOC only.	WANE I-GAD 4.6	FIKOX I-GAD 10.2	One Minute Holding Pattern
I-GAD 1.3	2500	244°	3600
1620*	2500	064°	GS 3.00° TCH 43
1.7 NM	1.6 NM	2.7 NM	2.9 NM
4.2 NM			
CATEGORY	A	B	C
S-ILS 24	779-¾	219 (300-¾)	
S-LOC 24	1140-1 580 (600-1)	1140-1¾ 580 (600-1¾)	
CIRCLING	1140-1 571 (600-1)	1440-2½ 871 (900-2½)	1680-3 1111 (1200-3)