

WAAS CH 65905 W24A	APP CRS 244°	Rwy Ldg TDZE 560 Apt Elev 569
--	------------------------	---

RNAV (GPS) RWY 24

NORTHEAST ALABAMA RGNL (GAD)

RNP APCH-GPS.


▼


⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C .
When local altimeter setting is not received, use Anniston altimeter setting and increase LPV DA to 847 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1082 feet and all visibilities ½ SM; increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ½ SM. Baro-VNAV and VDP NA when using Anniston altimeter setting.

MISSED APPROACH: Climb to 3600 direct CEGON and on track 221° to STAMP and hold, continue climb-in-hold to 3600.

AWOS-3PT 127.825	BIRMINGHAM APP CON 125.45 279.65	CLNC DEL 120.05 257.7	UNICOM 122.725 (CTAF) 0
----------------------------	--	---------------------------------	-----------------------------------

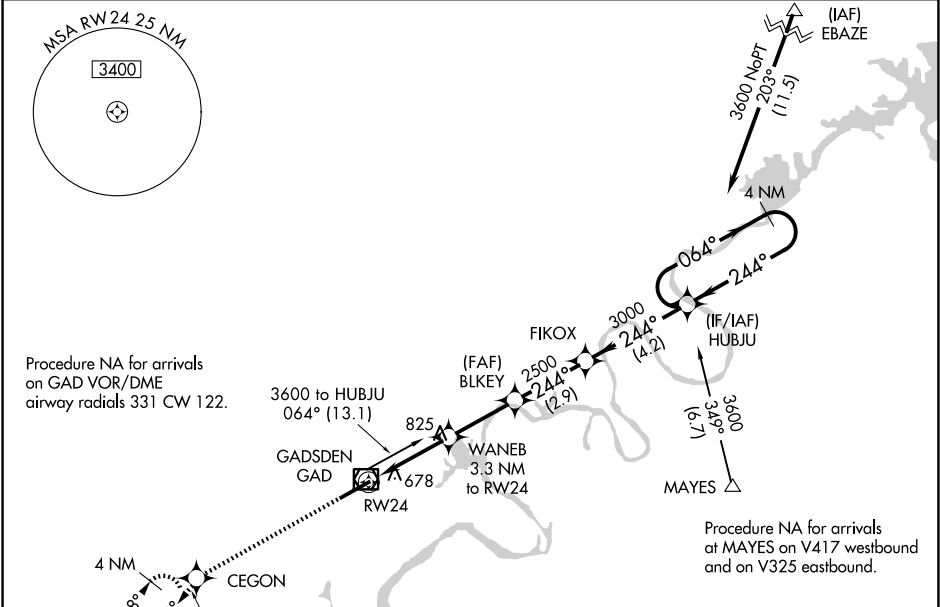

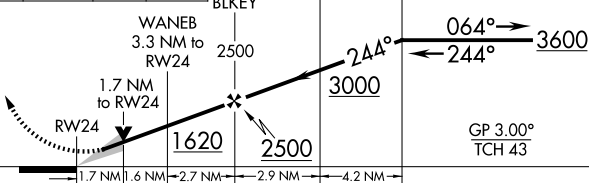3600 ↑		CEGON 	tr 221°	STAMP △			
					4 NM Holding Pattern		
CATEGORY		A		B		C	D
LPV	DA	781- $\frac{3}{4}$		221 (300- $\frac{3}{4}$)			
LNAV/ VNAV	DA	1016-1 $\frac{3}{8}$		456 (500-1 $\frac{3}{8}$)			
LNAV MDA		1140-1	580 (600-1)	1140-1 $\frac{5}{8}$		580 (600-1 $\frac{5}{8}$)	
CIRCLING		1140-1	571 (600-1)	1440-2 $\frac{1}{2}$ 871 (900-2 $\frac{1}{2}$)		1680-3 1111 (1200-3)	

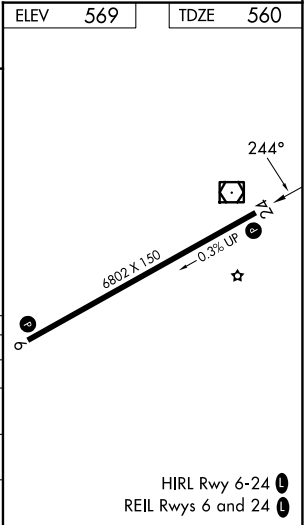

SE-4, 03 SEP 2026 to 01 OCT 2026

SE-4, 03 SEP 2026 to 01 OCT 2026