SAN DIEGO, CALIFORNIA

RNAV (GPS) RWY 24L

MIRAMAR MCAS (JOE FOSS FLD) (KNKX) [USN]

WAAS	APCH CRS	Rwy Idg	8001
CH 54028	243°	TDZE	477
W24A		Arpt Elev	477

RNP APCH

MISSED APPROACH: Climb to 3000 direct HUVEL, 288° track to REDIN and hold.

ATIS ★	SOCAL APP CON	FOSS TOWER ★	GND CON	CLNC DEL	LA CENTER	ASR/PAR
133.475 352.0	132.2 269.1	135.2 298.925 L	128.625 307.325	125.975 254.325	291.7	

For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 54° C (130°F).

CAUTION: Intermediate deceleration segment descent gradient 309 FPM is greater than 150 FPM.

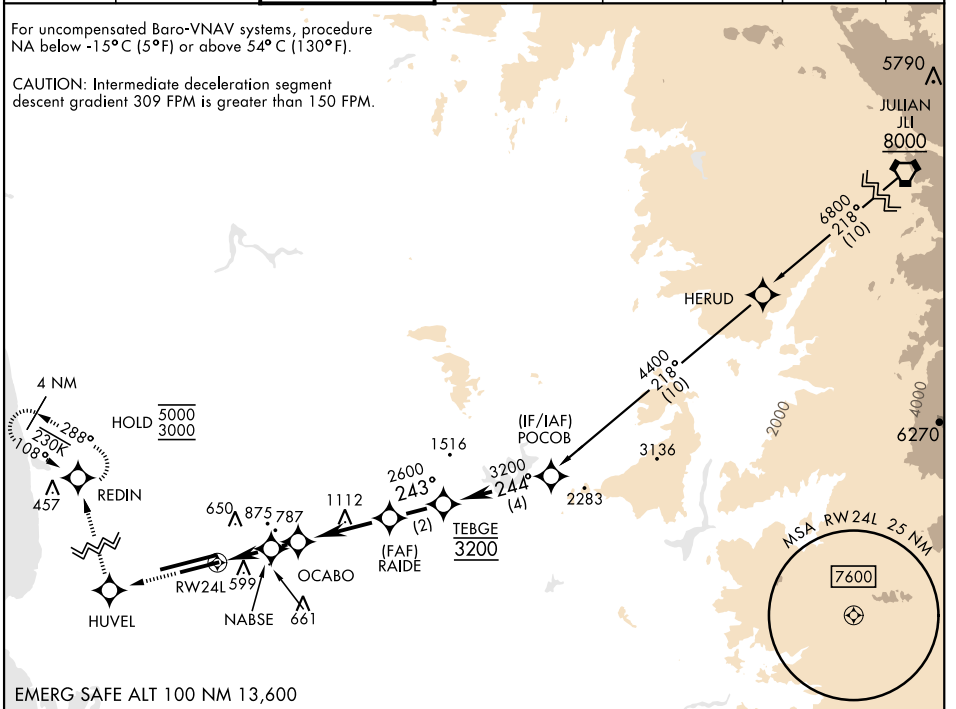

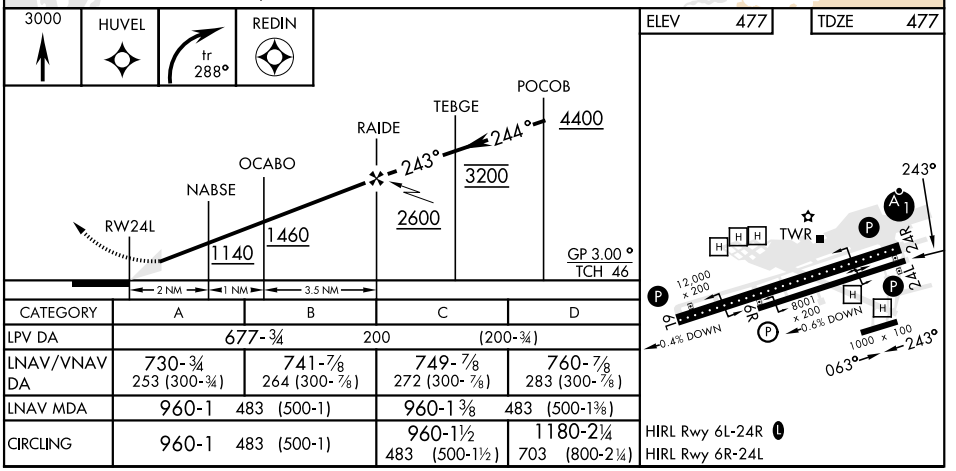

ELEV 477 TDZE 477

CATEGORY	A	B	C	D
LPV DA	677-¾ 200 (200-¾)			
LNAV/VNAV DA	730-¾ 253 (300-¾)	741-⅞ 264 (300-⅞)	749-⅞ 272 (300-⅞)	760-⅞ 283 (300-⅞)
LNAV MDA	960-1 483 (500-1)		960-1⅜ 483 (500-1⅜)	
CIRCLING	960-1 483 (500-1)		960-1½ 483 (500-1½)	1180-2¼ 703 (800-2¼)

HIRL Rwy 6L-24R L
HIRL Rwy 6R-24L

SAN DIEGO, CALIFORNIA 32°52'N-117°09'W MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

Amdt 4 27JAN22

RNAV (GPS) RWY 24L

SW-3, 03 SEP 2026 to 01 OCT 2026