RNAV (GPS) RWY 22

MILLINGTON/MEMPHIS (NQA)

WAAS CH 86212 W22A	APP CRS 219°	Rwy Ldg 8001 / TDZE 322 / Apt Elev 322

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E visibility to ¾ SM, LNAV/VNAV all Cats visibility to 1⅜ SM, and LNAV Cat E visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 840 then climbing right turn to 2500 direct ZIVNY and hold.

AWOS-3	MEMPHIS APP CON	MILLINGTON TOWER ★	GND CON	UNICOM
118.925	119.1 291.6 (176°-355°) 125.8 338.3 (356°-175°)	120.25 (CTAF) L 340.2	121.375	122.95

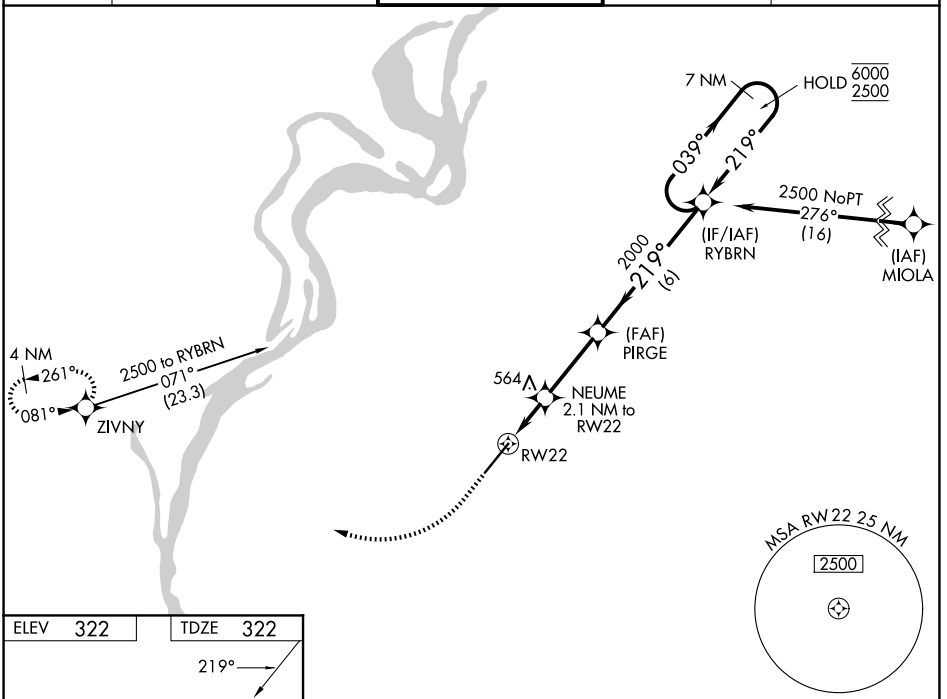

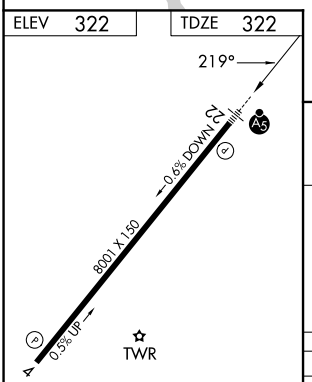

REIL Rwy 22
REIL Rwy 4 L
HIRL Rwy 4-22 L

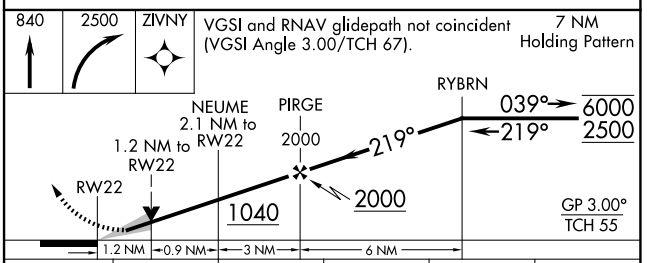

CATEGORY	A	B	C	D	E
LPV DA	522-½ 200 (200-½)				
LNAV/VNAV DA	784-1 462 (500-1)				
LNAV MDA	780-½ 458 (500-½)		780-⅞ 458 (500-⅞)		
CIRCLING	800-1 478 (500-1)	820-1 498 (500-1)	920-1½ 598 (600-1½)	960-2 638 (700-2)	960-2¼ 638 (700-2¼)

SE-1, 03 SEP 2026 to 01 OCT 2026
SE-1, 03 SEP 2026 to 01 OCT 2026