

WAAS CH 53417 W35A	APP CRS 353°	Rwy Idg TDZE 1561 Apt Elev 1563
--	------------------------	---


RNAV (GPS) RWY 35

HOBART RGNL (HBR)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Altus/Quartz Mountain Rgnl altimeter setting and increase LPV DA to 1882 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 2020 feet and visibility all Cats ¼ SM; increase all MDAs 80 feet and Circling Cat C visibility ¼ SM. Baro-VNAV NA when using Altus/Quartz Mountain Rgnl altimeter setting. VDP NA with Altus/Quartz Mountain Rgnl altimeter setting.

MISSED APPROACH: Climb to 3400 direct BIPGE and hold.

ASOS 133.325	ALTUS APP CON★ 125.1 353.7	UNICOM 122.8 (CTAF)
------------------------	--------------------------------------	-------------------------------

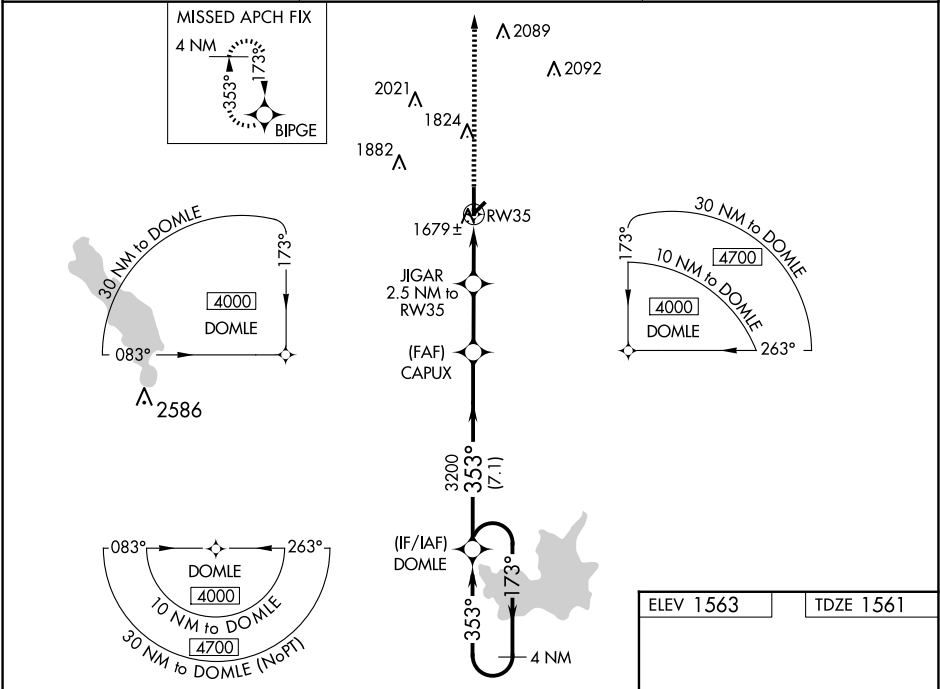

4 NM Holding Pattern DOMLE		3400 BIPGE	
4000 ←173° 353°→ 353°		*LNNAV only.	
GP 3.00° TCH 42		*1.1 NM to RW35	
7.1 NM		2.5 NM	
3200		2400	
1811-1		250 (300-1)	
1949-1¼		388 (400-1¼)	
1940-1		379 (400-1)	
1980-1		2320-2¼	
417 (500-1)		897 (900-3)	

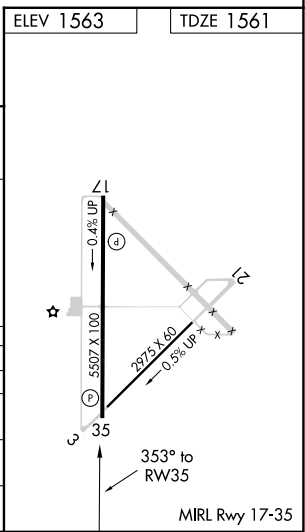

SC-1, 03 SEP 2026 to 01 OCT 2026

SC-1, 03 SEP 2026 to 01 OCT 2026