

WAAS CH 53621 W07A	APP CRS 068°	Rwy Ldg 10002 TDZE 742 Apt Elev 742
--	------------------------	--

RNAV (GPS) RWY 7

CHICAGO/ROCKFORD INTL (RFD)

RNP APCH - GPS.

⚠

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.


ALSF-2

ⓐ

📶

MISSED APPROACH: Climb to 2500 direct TONGE and hold.

ATIS 127.6	ROCKFORD APP CON 121.0 327.0	ROCKFORD TOWER 118.1 290.375	GND CON 121.9 290.375
----------------------	--	--	---------------------------------

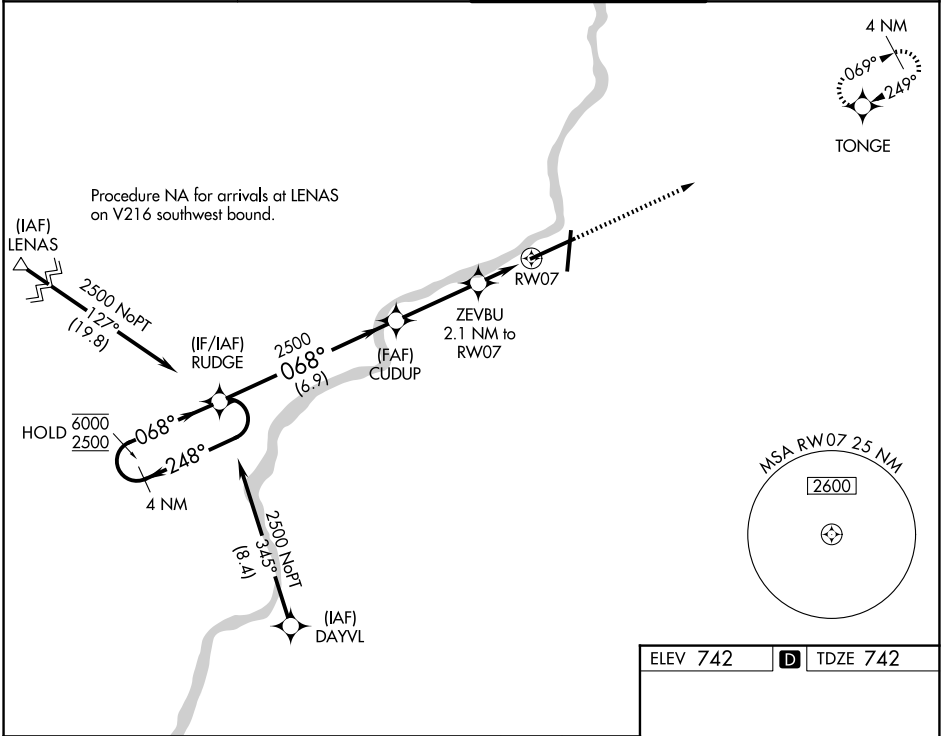

ELEV 742 **D** TDZE 742

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69°).

2500 TONGE

6000
2500

←248°
068°→

GP 3.00°
TCH 60

RUDGE

CUDUP

2500

1460

ZEVBU 2.1 NM to RW07

1.4 NM to RW07

RW07

6.9 NM

3.2 NM

0.8 NM

1.4 NM

61
25
TWR

0.3% DOWN
10002 X 150

0.6% UP
8200 X 150

068°

CATEGORY	A	B	C	D
LPV DA	942/24 200 (200-½)			
LNAV/VNAV DA	1167/45 425 (500-¾)			
LNAV MDA	1240/24	498 (500-½)	1240/50	498 (500-1)
CIRCLING	1240-1 498 (500-1)	1280-1 538 (600-1)	1320-1½ 578 (600-1½)	1460-2¼ 718 (800-2¼)

REIL Rwy 19 and 25
HIRL Rwy 1-19 and 7-25
TDZ/CL Rwy 1 and 7