

WAAS CH 69503 W27A	APP CRS 274°	Rwy Ldg 6122 TDZE 812 Apt Elev 812
--	------------------------	---

RNAV (GPS) RWY 27
ATHENS/BEN EPPS (AHN)

RNP APCH - GPS.



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Circling to Rwy 2, 20 NA at night. When local altimeter setting not received, use WDR altimeter setting: increase LPV DA to 1069 feet; increase LNAV/VNAV DA to 1121 feet; increase all MDAs 60 feet and increase LNAV Cat C, D visibility ¼ SM and Circling Cat D visibility ¼ SM. Baro-VNAV and VDP NA when using WDR altimeter setting. Hop table does not apply to LPV and LNAV/VNAV all Cats.

MALSF




ASOS 132.875	ATLANTA APP CON ★ 132.475 291.1	ATHENS TOWER ★ 126.3 (CTAF) 0 338.275	GND CON 121.8	UNICOM 122.95
-----------------	------------------------------------	--	------------------	------------------


MISSED APCH FIX

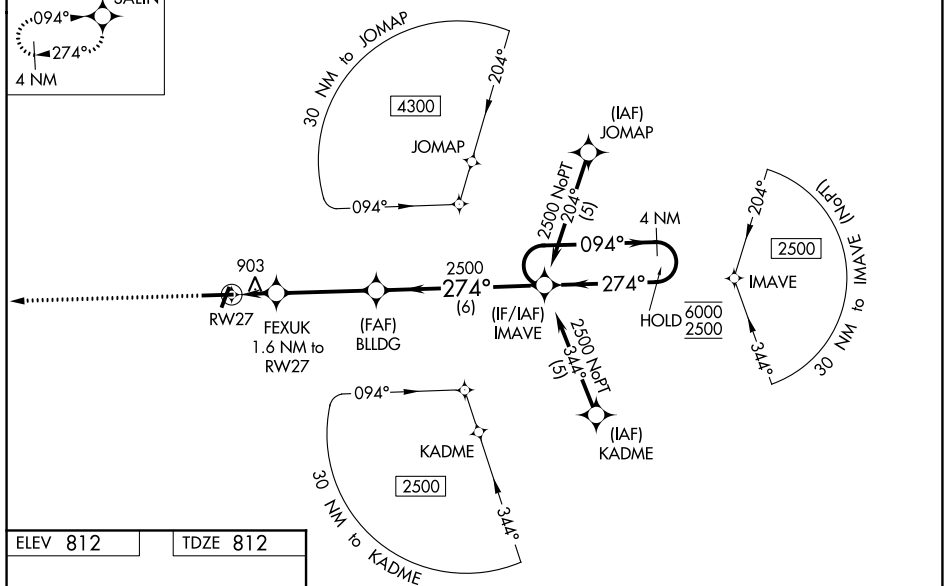

ELEV 812		TDZE 812
----------	--	----------



2500	SALIN	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 44).	4 NM
------	-------	--	------

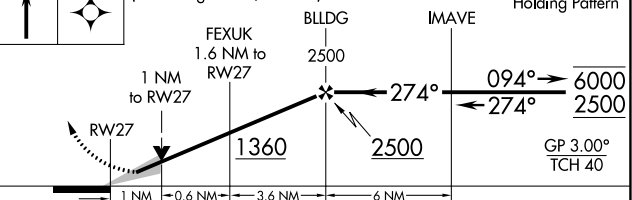

CATEGORY	A	B	C	D
LPV DA	1012- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)			
LNAV/VNAV DA	1064- $\frac{3}{4}$ 252 (300- $\frac{3}{4}$)			
LNAV MDA	1160- $\frac{3}{4}$ 348 (400- $\frac{3}{4}$)			
CIRCLING	1260-1 448 (500-1)	1280-1 468 (500-1)	1320-1 $\frac{1}{2}$ 508 (600-1 $\frac{1}{2}$)	1460-2 648 (700-2)

MIRL Rwy 2-20
HIRL Rwy 9-27 **L**

ATHENS, GEORGIA
Amdt 1C 03SEP26

33°57'N-83°20'W

ATHENS/BEN EPPS (AHN)
RNAV (GPS) RWY 27

SE-4, 03 SEP 2026 to 01 OCT 2026