

WAAS CH 78001 W32A	APP CRS 317°	Rwy Ldg 7120 TDZE 102 Apt Elev 107
--	------------------------	---


RNAV (GPS) RWY 32
MC ALLEN INTL (MFE)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). Circling NA northeast of Rwy 14-32. DME/DME RNP-0.3 NA.


A When local altimeter setting not received, use Wesloco altimeter setting: increase all DA 39 feet and LNAV/VNAV all Cat visibility $\frac{1}{4}$ mile; increase all MDA 40 feet and LNAV Cat C/D visibility $\frac{1}{8}$ mile. Baro-VNAV and VDP NA when using Wesloco altimeter setting.


MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct SANCA and hold.

ATIS 128.5	VALLEY APP CON 126.55 377.2	MC ALLEN TOWER★ 118.5 (CTAF) 0 256.9	GND CON 121.8	UNICOM 122.95
----------------------	---------------------------------------	--	-------------------------	-------------------------

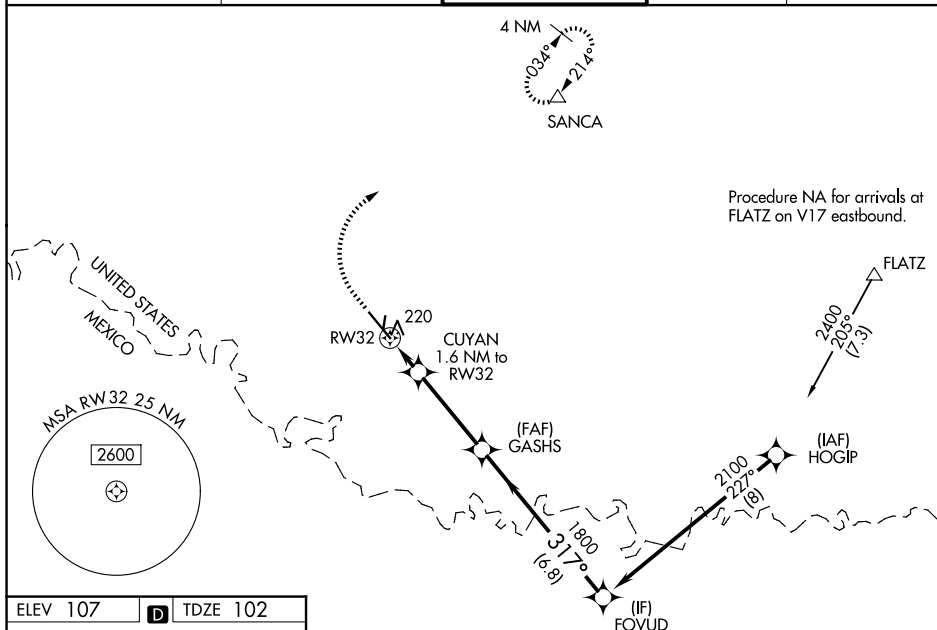

ELEV 107	D	TDZE 102
----------	----------	----------

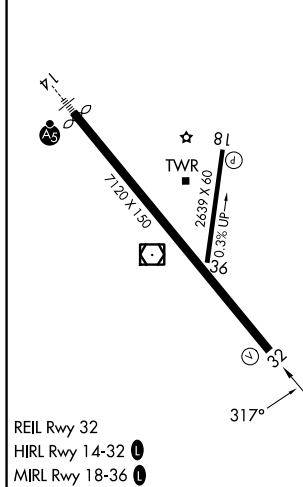

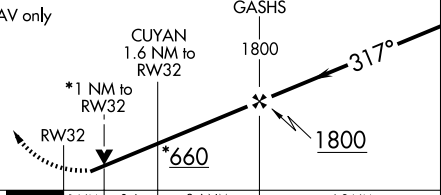800 ↑	2000 ↗	SANCA △	VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 53).			
*LNAV only 			FOVUD <u>2100</u> GP 3.00% TCH 50			
CATEGORY		A		B	C	D
LPV	DA			302- ³ / ₄	200 (200- ³ / ₄)	
LNAV/ VNAV	DA			391- ⁷ / ₈	289 (300- ⁷ / ₈)	
LNAV	MDA			480-1	378 (400-1)	
CIRCLING		580-1	473 (500-1)	580-1 ¹ / ₂ 473 (500-1 ¹ / ₂)	800-2 ¹ / ₄ 693 (700-2 ¹ / ₄)	