# VOR RWY 14

## MC ALLEN INTL (MFE)

| VOR/DME MFE | APP CRS | Rwy Ldg | 6983 |
|---|---|---|---|
| 117.2 | 134° | TDZE | 107 |
| Chan 119 | | Apt Elev | 107 |

Circling NA northeast of Rwy 14-32. ADF or DME required. For inop MALSR, increase S-14 Cat C/D visibility to 1⅜ mile. When local altimeter setting not received, use Weslaco altimeter setting and increase all MDA 40 feet and S-14 Cat C/D and Circling Cat C visibility ⅛ mile. VDP NA when using Weslaco altimeter setting.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct MFE VOR/DME and hold.

| ATIS | VALLEY APP CON | MC ALLEN TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 128.5 | 126.55 377.2 | 118.5 (CTAF) L 256.9 | 121.8 | 122.95 |

## ADF or DME REQUIRED

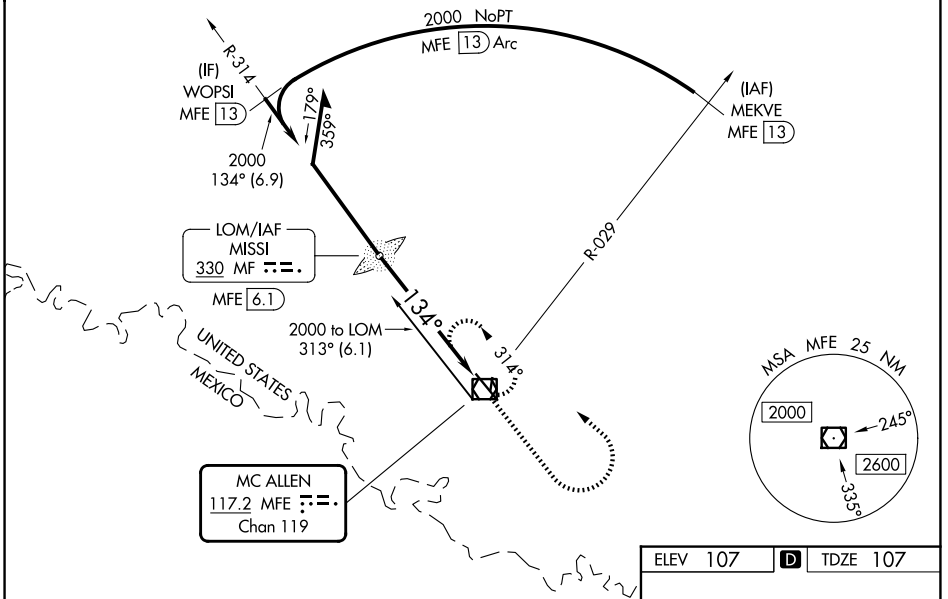


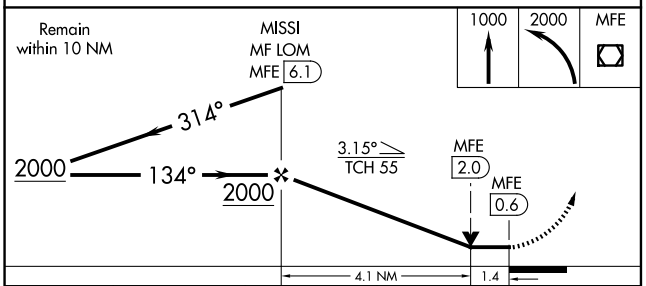


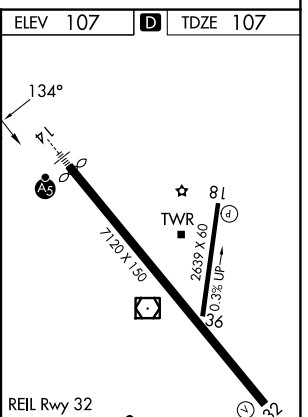


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-14 | 620-½ 513 (600-½) | | 620-1 513 (600-1) | |
| CIRCLING | 620-1 513 (600-1) | | 620-1½ 513 (600-1½) | 800-2¼ 693 (700-2¼) |

FAF to MAP 5.5 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 5:30 | 3:40 | 2:45 | 2:12 | 1:50 |



SC-3, 03 SEP 2026 to 01 OCT 2026
SC-3, 03 SEP 2026 to 01 OCT 2026