


WAAS CH 66006 W29A	APP CRS 295°	Rwy Ldg 7732 TDZE 32 Apt Elev 40
--	------------------------	---

RNAV (GPS) RWY 29

YAKUTAT (YAK) (PAYA)

RNP APCH - GPS. ⚠ Circling Rwy 20 NA at night. Rwy 29 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV, LNAV/VNAV all Cats, LNAV Cat A and B. When Yakutat altimeter setting not received, procedure NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV Cat C and D visibility to 1 ¾ SM.	MALSRL ⚠	MISSED APPROACH: Climb to 600 then climbing left turn to 3000 direct CIMUF and hold, continue climb-in-hold to 3000.
---	-------------	--

ASOS 135.75	ANCHORAGE CENTER 119.0 263.1	JUNEAU RADIO 123.6 (CTAF) 0
-----------------------	--	---------------------------------------

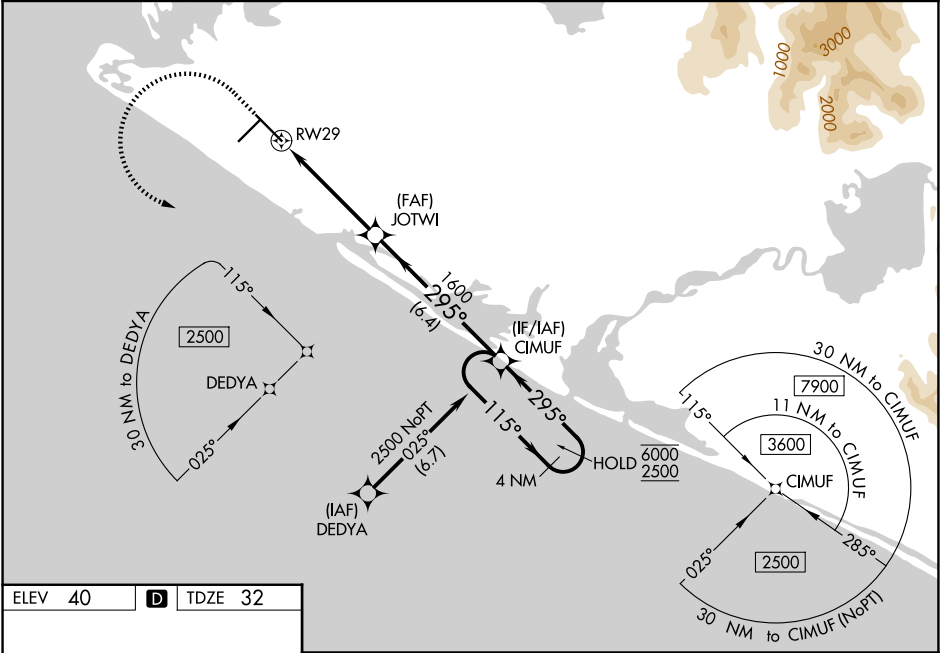

REIL Rwy's 2 and 20
HIRL Rwy's 2-20 and 11-29

  		CIMUF		4 NM Holding Pattern	
		1600		115° → 6000 ← 295° 2500	
		1.4 NM to RW29		295°	
1.4 NM		3.3 NM		6.4 NM	
CATEGORY		A		B	
LPV DA		317-1		285 (300-1)	
LNAV/VNAV DA		409-1		377 (400-1)	
LNAV MDA		540-1		508 (500-1)	
CIRCLING		540-1 500 (500-1)		820-2¼ 780 (800-2¼)	
				820-2½ 780 (800-2½)	