
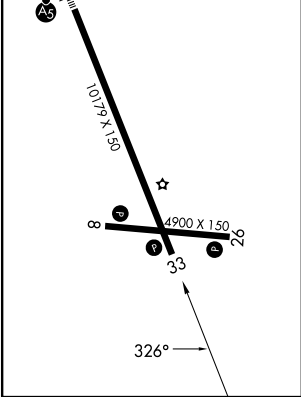


WAAS CH 49106 W33A	APP CRS 326°	Rwy Ldg 10179 TDZE 93 Apt Elev 100
--	------------------------	---

RNAV (GPS) RWY 33
COLD BAY (CDB) (PACD)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Circling NA for Cat A southwest of Rwy 15-33 at night. Circling NA for Cat B/C/D southwest of Rwy 15-33. ▲	MISSED APPROACH: Climb to 3000 direct DEADS and hold.
---	---

ASOS 135.75	ANCHORAGE CENTER 118.5 278.3	COLD BAY RADIO 123.6 (CTAF) 0
-----------------------	--	---

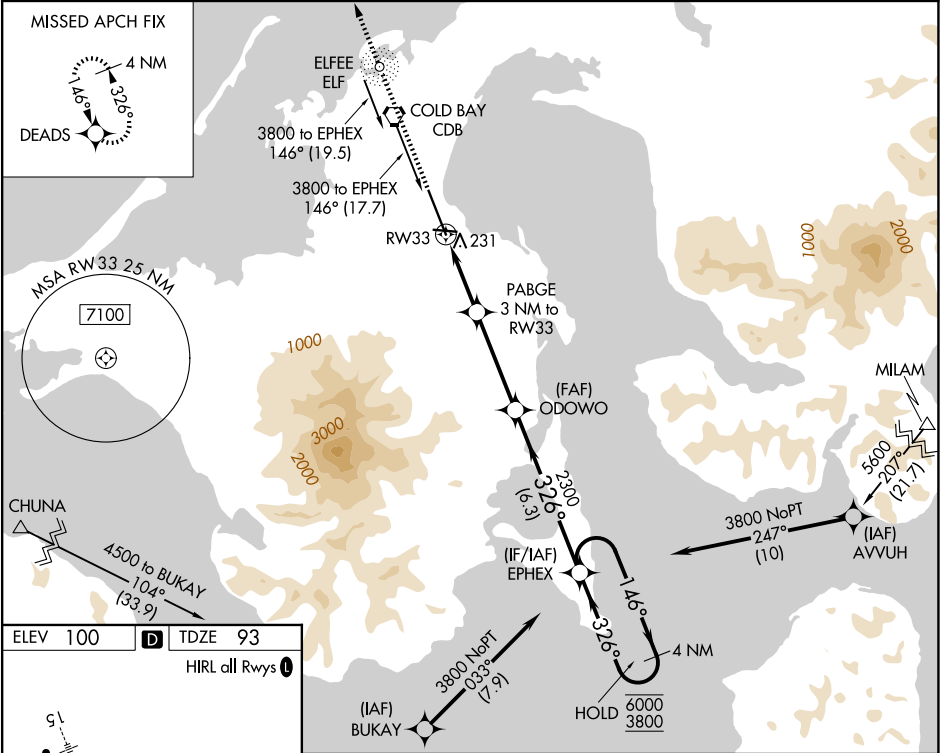

3000	DEADS	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 36).	EPHEX	4 NM Holding Pattern
*LNAV only	*1.2 NM to RW33	PABGE 3 NM to RW33	ODOWO	146° → 6000 ← 326° 3800
RW33	1.2 NM	1.8 NM	3.8 NM	6.3 NM
10179 X 150	4900 X 150	326°	1100*	2300
8	33	326°		GP 3.00° TCH 55
CATEGORY	A	B	C	D
LPV DA	293-¾ 200 (200-¾)			
LNAV/VNAV DA	392-⅞ 299 (300-⅞)			
LNAV MDA	500-1	407 (400-1)	500-1½	407 (400-1½)
CIRCLING	540-1 440 (500-1)	560-1 460 (500-1)	560-1½ 460 (500-1½)	860-2½ 760 (800-2½)