RNAV (GPS) RWY 32

DELAWARE COUNTY RGNL (MIE)

WAAS	APP CRS	Rwy Ldg	6500
CH 72601	319°	TDZE	937
W32A		Apt Elev	937

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
For inop ALS, increase all LPV Cats visibility to 1¼ SM, LNAV/VNAV to 1⅝ SM.

MALSR

MISSED APPROACH: Climb to 2800 direct JOGBA and hold.

ATIS	INDIANAPOLIS APP CON	MUNCIE TOWER ★	GND CON	UNICOM
133.25	120.65 317.8	120.1 (CTAF) L	121.9	122.95

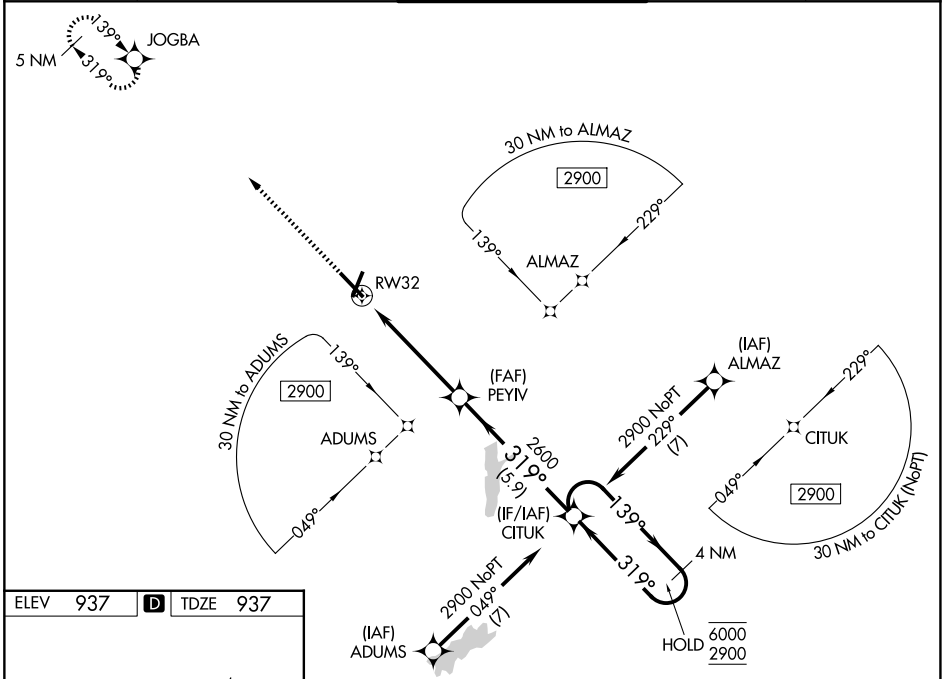

ELEV 937 D TDZE 937

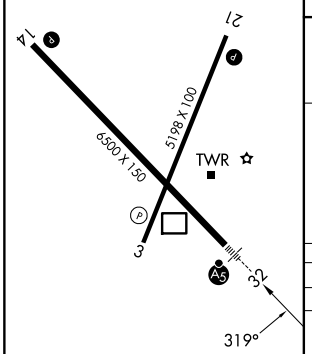

HIRL Rwy 14-32 L
MIRL Rwy 3-21 L
REIL Rwys 3, 14 and 21 L

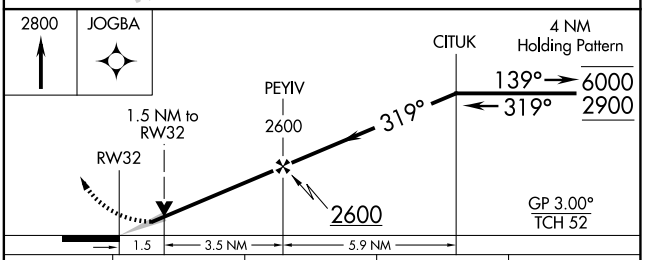

CATEGORY	A	B	C	D
LPV DA	1241-½ 304 (400-½)			
LNAV/VNAV DA	1396-⅞ 459 (500-⅞)			
LNAV MDA	1480-½ 543 (600-½)		1480-1⅛ 543 (600-1⅛)	
CIRCLING	1480-1 543 (600-1)		1500-1⅝ 563 (600-1⅝)	1560-2 623 (700-2)

EC-2, 03 SEP 2026 to 01 OCT 2026
EC-2, 03 SEP 2026 to 01 OCT 2026