ILS or LOC RWY 21

FLAGSTAFF PULLIAM (FLG)

LOC I-FLG	APP CRS	Rwy Ldg	7000
110.5	214°	TDZE	7003
		Apt Elev	7014

T A Autopilot coupled approach NA below 7640 feet. DME required. DME from FLG VOR/DME. Simultaneous reception of I-FLG and FLG DME required. For inop ALS increase S-ILS 21 all Cats visibility to ⅞.

MALSR

MISSED APPROACH: Climb to 7500, then climbing left turn to 11000 on heading 130° and FLG R-172 to OATES INT/FLG VOR/DME 16.7 DME and hold, continue climb-in-hold to 11000.

ATIS	PHOENIX APP CON	FLAGSTAFF TOWER ★	GND CON	UNICOM
125.8	126.375 236.775	134.55 (CTAF) L 239.25	121.9	122.95

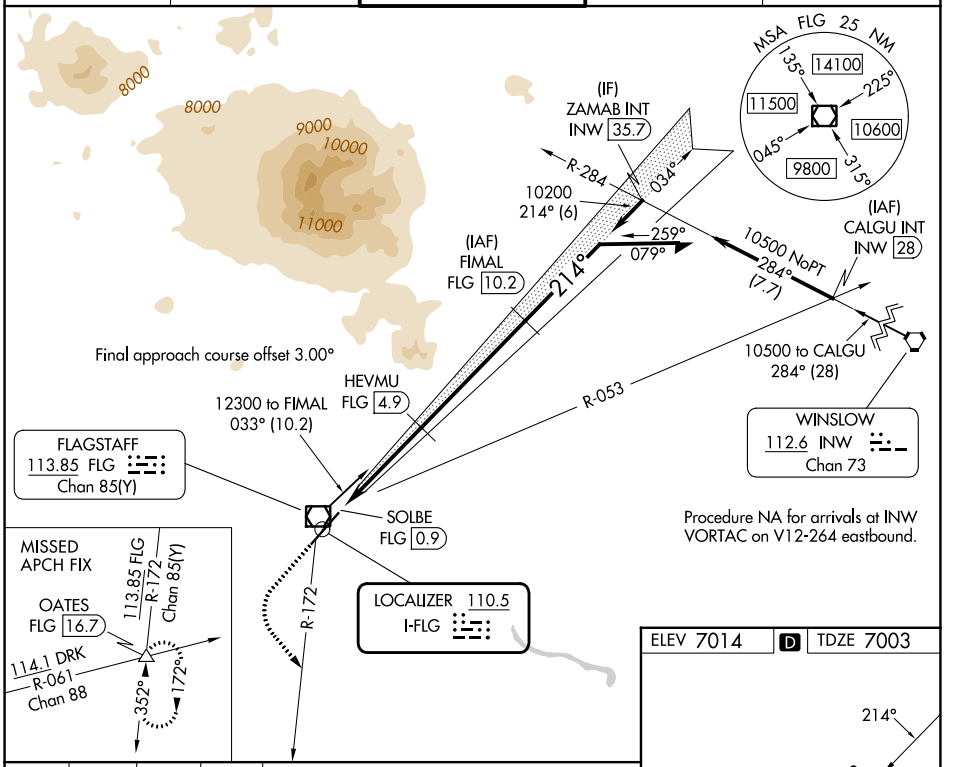

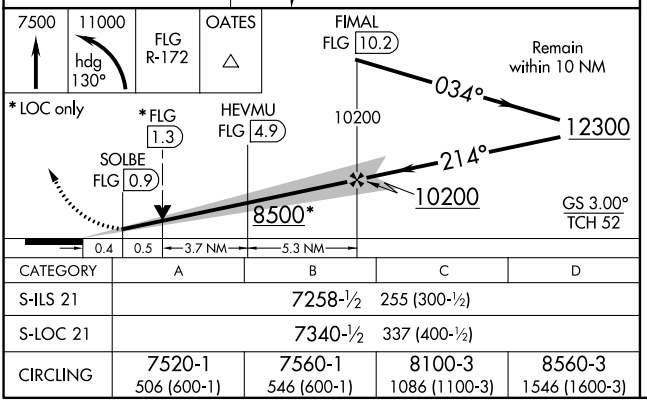

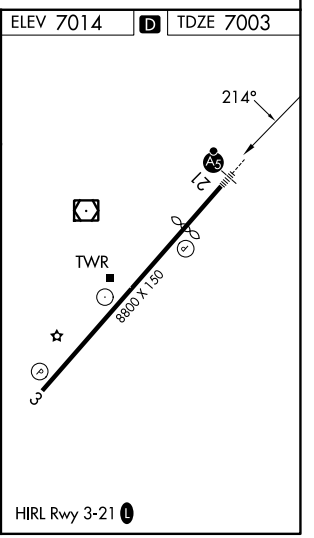

CATEGORY	A	B	C	D
S-ILS 21	7258-½ 255 (300-½)			
S-LOC 21	7340-½ 337 (400-½)			
CIRCLING	7520-1 506 (600-1)	7560-1 546 (600-1)	8100-3 1086 (1100-3)	8560-3 1546 (1600-3)

HIRL Rwy 3-21 L

SW-4, 03 SEP 2026 to 01 OCT 2026
SW-4, 03 SEP 2026 to 01 OCT 2026