

WAAS
CH **77909**
W27A

APP CRS
269°

Rwy Ldg
TDZE
386

Apt Elev
386

RNAV (GPS) RWY 27
HENDERSON CITY-COUNTY (EHR)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using EVV altimeter setting. When local altimeter setting not received, use EVV altimeter setting and increase LPV DA to 677 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 851 feet and all visibilities ½ SM. Increase all MDAs 60 feet.

MISSED APPROACH: Climb to 2500 direct BIKME and hold.

AWOS-3PT 118.85	EVANSVILLE APP CON ★ 124.025 257.8	UNICOM 122.8 (CTAF) 0
---------------------------	--	--

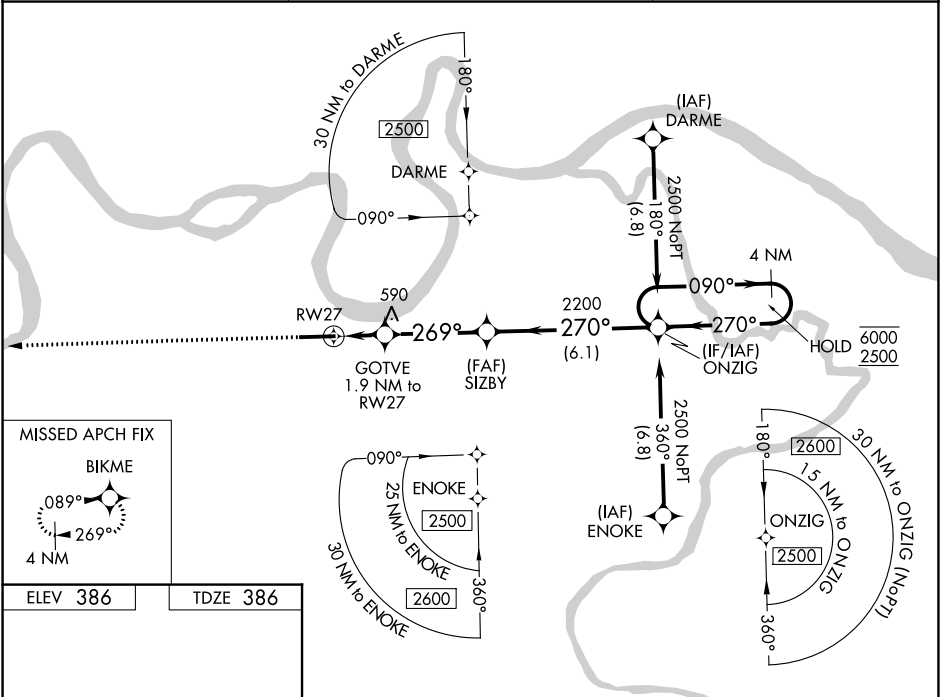

↑

2500

BIKME

↑

2200

GOTVE
1.9 NM to RW27

↑

2200

SIZBY

↑

2200

ONZIG

↑

2200

GP 3.00°
TCH 40

↑

2200

GOTVE
1.9 NM to RW27

↑

2200

SIZBY

↑

2200

ONZIG

↑

2200

GP 3.00°
TCH 40

↑

2200

GOTVE
1.9 NM to RW27

↑

2200

SIZBY

↑

2200

ONZIG

↑

2200

GP 3.00°
TCH 40

↑

2200

GOTVE
1.9 NM to RW27

↑

2200

SIZBY

↑

2200

ONZIG

↑

2200

GP 3.00°
TCH 40

↑

2200

GOTVE
1.9 NM to RW27

↑

2200

SIZBY

↑

2200

ONZIG

↑

2200

GP 3.00°
TCH 40

↑

2200

GOTVE
1.9 NM to RW27

↑

2200

SIZBY

↑

2200

ONZIG

↑

2200

GP 3.00°
TCH 40