RNAV (GPS) RWY 2

JACKSON RGNL (MKL)

WAAS CH 93511 W02A	APP CRS 023°	Rwy Ldg 6007 TDZE 433 Apt Elev 433

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C.
For inop ALS, increase visibility LNAV Cats A/B to 1 SM, and Cats C/D to 1 3/8 SM.

MALSR

MISSED APPROACH: Climb to 3000 direct GARTZ and hold.

ASOS	MEMPHIS CENTER	JACKSON TOWER ★	GND CON	UNICOM
119.325	134.65 316.15	127.15 (CTAF) L 249.95	120.9	122.95

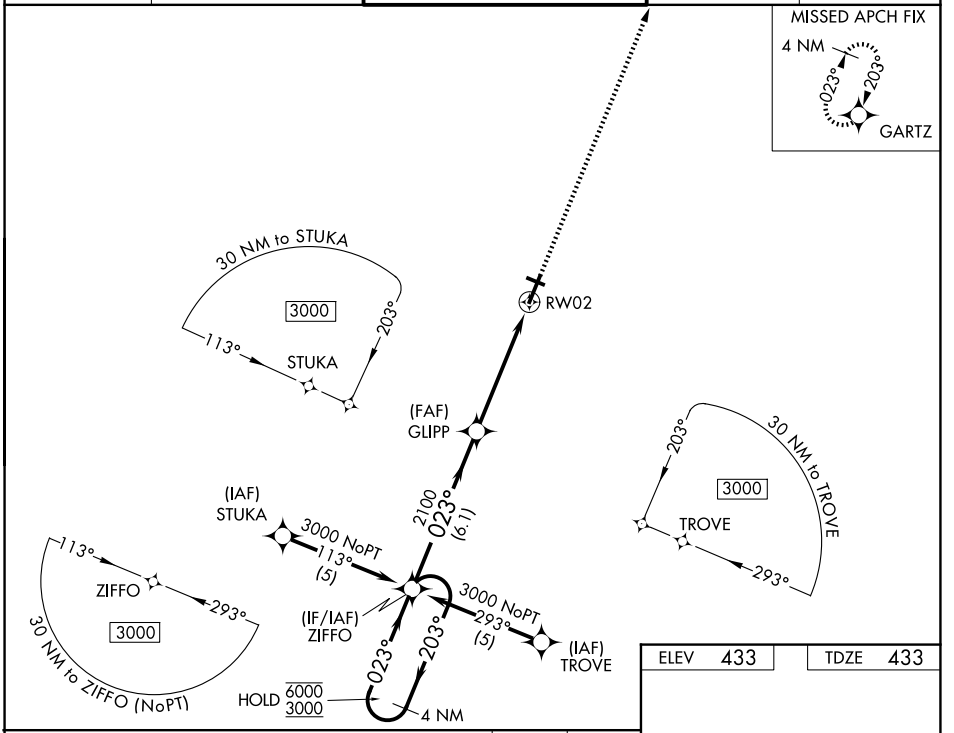

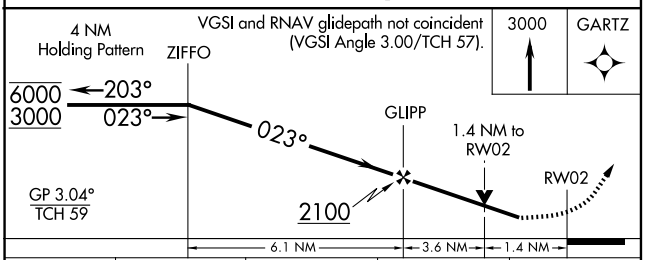

CATEGORY	A	B	C	D
LPV DA	772-¾ 339 (400-¾)			
LNAV/VNAV DA	886-⅞ 453 (500-⅞)			
LNAV MDA	900-¾ 467 (500-¾)		900-1 467 (500-1)	
CIRCLING	900-1 467 (500-1)	920-1 487 (500-1)	960-1½ 527 (600-1½)	1080-2 647 (700-2)

ELEV 433 TDZE 433

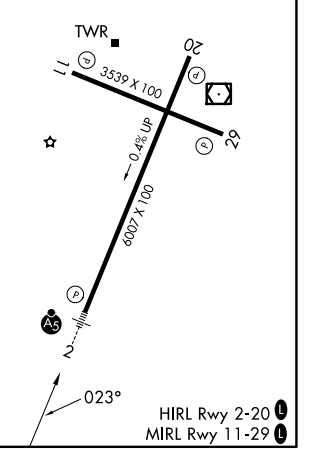

SE-1, 03 SEP 2026 to 01 OCT 2026
SE-1, 03 SEP 2026 to 01 OCT 2026