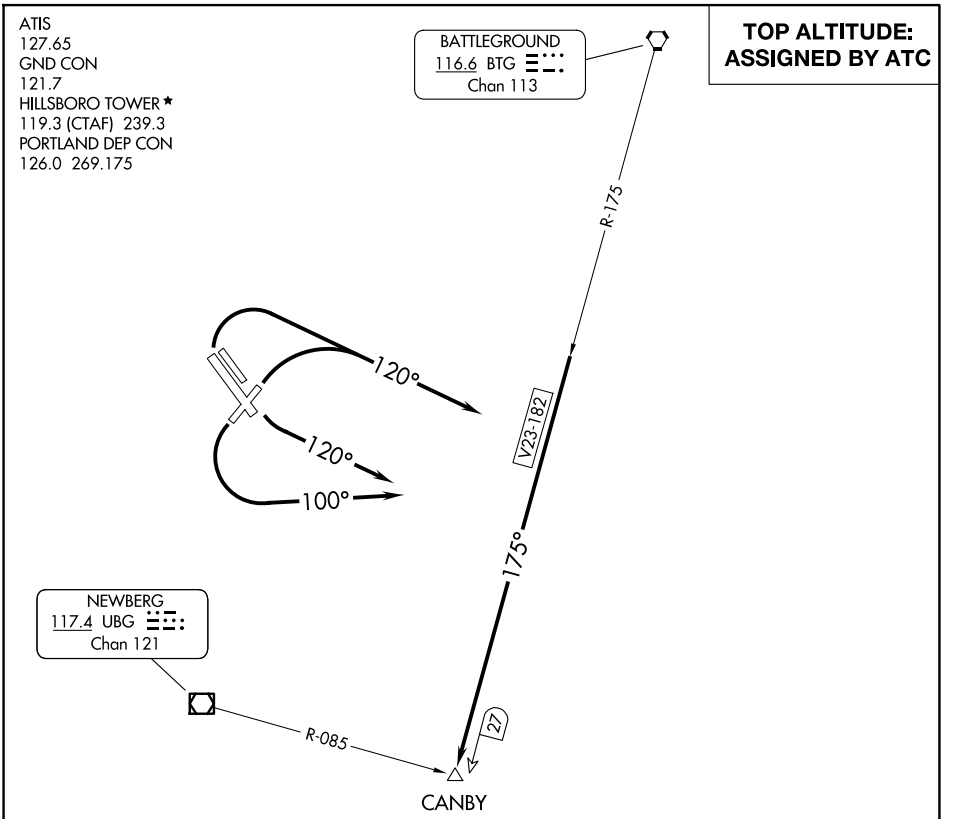

TAKEOFF MINIMUMS
Rwys 2: Standard with minimum climb of 305′ per NM to 2700.
Rwys 13L/R: Standard with minimum climb of 235′ per NM to 1500.
Rwy 20: Standard.
Rwys 31L/R: Standard with minimum climb of 280′ per NM to 2700.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 2, 31L/R: Climbing right turn heading 120°, thence. . . .
TAKEOFF RUNWAYS 13L/R: Climbing left turn heading 120°, thence. . . .
TAKEOFF RUNWAY 20: Climbing left turn heading 100°, thence. . . .

. . . .intercept BTG VORTAC R-175 to CANBY. Then on assigned route.
Maintain ATC assigned altitude.

NW-1, 03 SEP 2026 to 01 OCT 2026
NW-1, 03 SEP 2026 to 01 OCT 2026