# RNAV (GPS) RWY 13R

## PORTLAND-HILLSBORO (HIO)

| WAAS | APP CRS | Rwy Ldg | 6600 |
|---|---|---|---|
| CH 69502 | 127° | TDZE | 203 |
| W13A | | Apt Elev | 208 |

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Circling Rwy 13L, 31R NA at night. For inop ALS, increase LNAV Cat C/D visibility to 1⅜ SM. * RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct UBG VOR/DME and hold. Continue climb-in-hold to 3000.

| ATIS | PORTLAND APP CON | HILLSBORO TOWER * | GND CON | UNICOM |
|---|---|---|---|---|
| 127.65 | 126.0 269.175 | 119.3 (CTAF) L 239.3 | 121.7 | 122.95 |

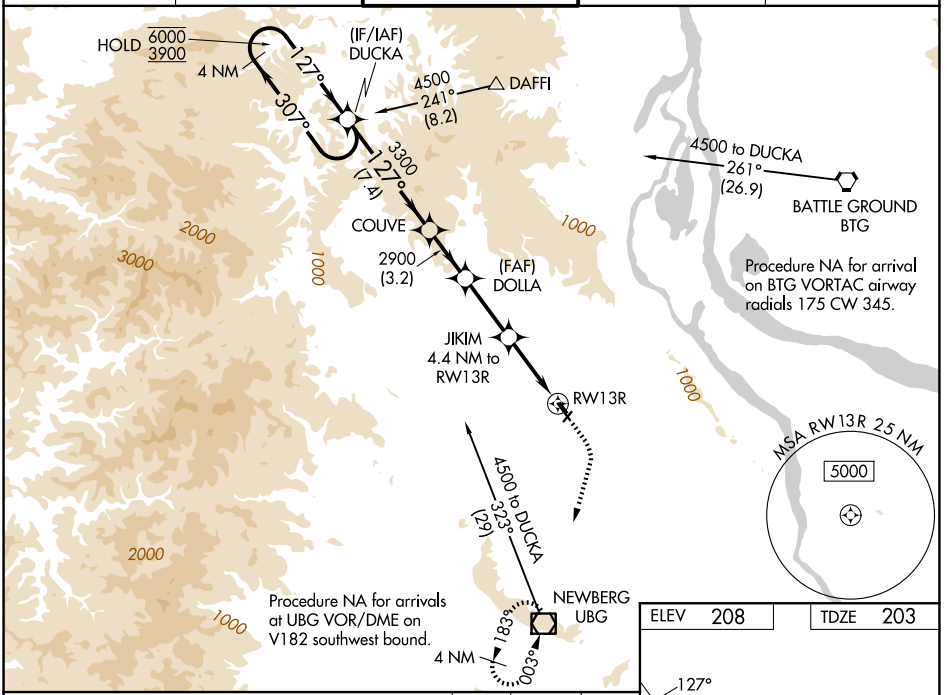


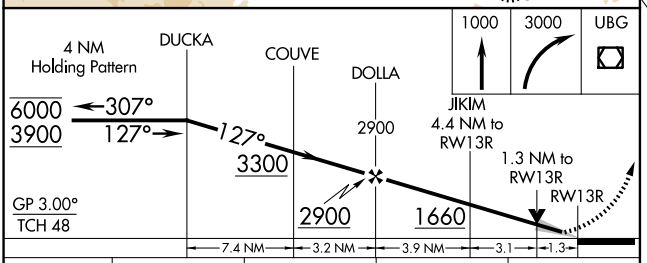


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA * | 403/24 200 (200-½) | | | |
| LNAV/VNAV DA | 661/45 458 (500-⅞) | | | |
| LNAV MDA | 680/24 477 (500-½) | | 680/50 477 (500-1) | |
| CIRCLING | 680-1 472 (500-1) | 720-1 512 (600-1) | 940-2 732 (800-2) | 980-2½ 772 (800-2½) |

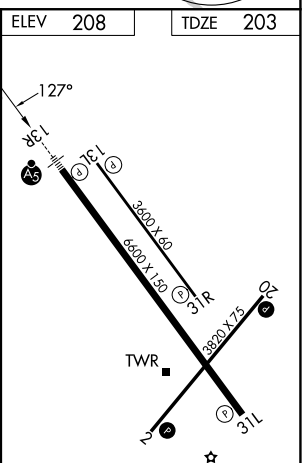




NW-1, 03 SEP 2026 to 01 OCT 2026
NW-1, 03 SEP 2026 to 01 OCT 2026