

RNAV (GPS) RWY 14R

WAAS Chan 75978 W14B	APCH CRS 142°	Rwy Idg 13,501 TDZE 228 Arpt Elev 228
--	-------------------------	--

[USN]


LEMOORE NAS (REEVES FIELD) (KNLC)

RNP APCH - GPS

▼

MISSED APPROACH: Climb to 2800 direct PHROG and hold.

ATIS★ 121.575 327.15	APP CON 124.1 269.025 (N) 118.15 269.025 (S)	TOWER ★ 128.3 360.2	GND CON 121.65 305.2	ASR/ PAR
--------------------------------	--	-------------------------------	--------------------------------	-------------

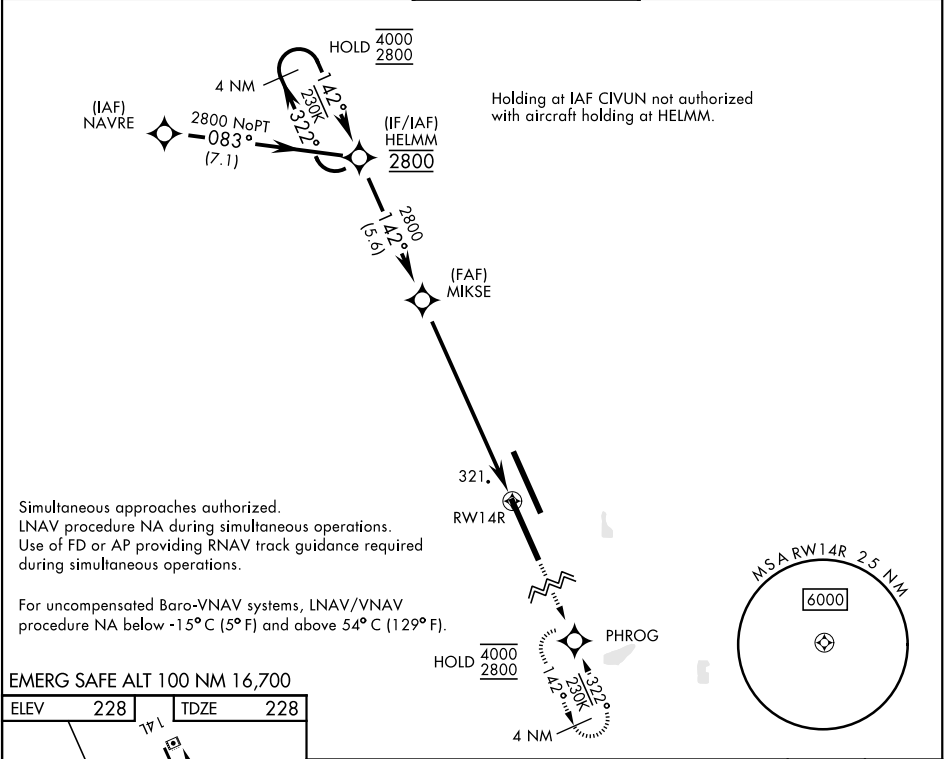


Simultaneous approaches authorized.
LNAV procedure NA during simultaneous operations.
Use of FD or AP providing RNAV track guidance required during simultaneous operations.

For uncompensated Baro-VNAV systems, LNAV/VNAV procedure NA below -15°C (5°F) and above 54°C (129°F).

EMERG SAFE ALT 100 NM 16,700

ELEV	228	TDZE	228
------	-----	------	-----

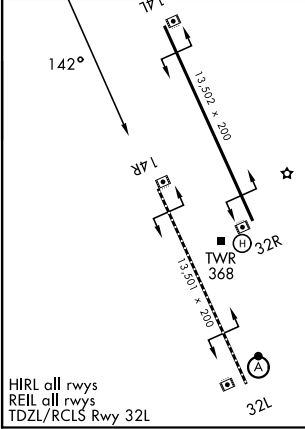

HIRL all rwys
REIL all rwys
TDZL/RCLS Rwy 32L

4 NM Holding Pattern					2800 PHROG	
HELM					MIKSE	
GP 3.00° TCH 51					1.6 NM to RWY 14R	
					7.9 NM	
CATEGORY	A	B	C	D		
LPV DA		428-3/4	200 (200-3/4)			
LNAV/VNAV DA		594-1	366 (400-1)			
LNAV MDA	780-1	552 (600-1)	780-1 5/8	552 (600-1 5/8)		
CIRCLING	780-1	552 (600-1)	780-1 5/8	552 (600-1 5/8)	780-2	552 (600-2)

RNAV (GPS) RWY 14R

SW-2, 03 SEP 2026 to 01 OCT 2026

SW-2, 03 SEP 2026 to 01 OCT 2026