VOR TBN	APP CRS	Rwy Ldg	5535
110.0	138°	TDZE	1158
		Apt Elev	1160

VOR RWY 15

WAYNESVILLE-ST ROBERT RGNL FORNEY FLD (TBN)

Procedure NA when R-4501B or R-4501H in use. Inop table does not apply to S-15 Cat A and B or to ZUTMA fix minimums. Circling NA west of Rwy 15-33. When local altimeter setting not received, use Rolla Ntl altimeter setting and increase all MDAs 80 feet and increase S-15 visibility Cats C/D ¼ SM and Circling Cat C visibility ⅛ SM. Inop table does not apply to Cats A/B when using Rolla Ntl altimeter setting. For inop ALS when using Rolla Ntl altimeter setting increase S-15 Cats C/D visibility to 1¾ SM. For inop ALS when using Rolla Ntl altimeter setting increase S-15 ZUTMA fix minimumsCats C/D visibility to 1⅜ SM. #DME from I-TBN LOC/DME.

MALSR

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 on TBN VOR R-323 to REBBS INT/I-TBN LOC/DME 11 DME and hold.

D-ATIS	KANSAS CITY CENTER	FORNEY TOWER ★	GND CON
118.7 229.4	128.35 284.675	125.4 (CTAF) L 268.7	123.75 256.8

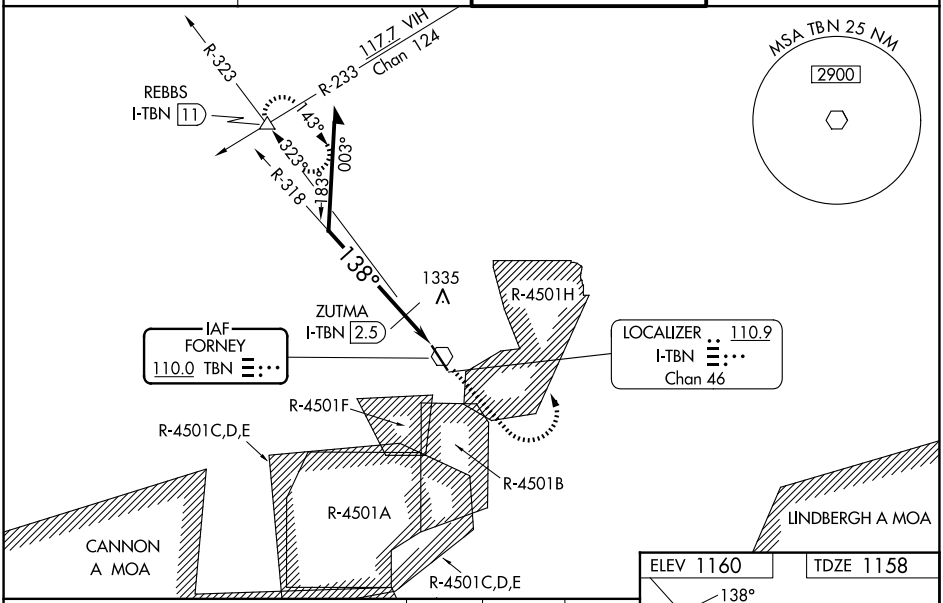

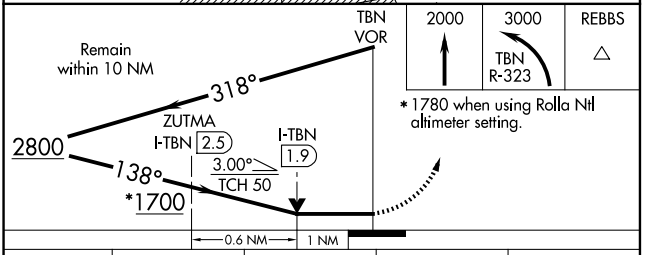

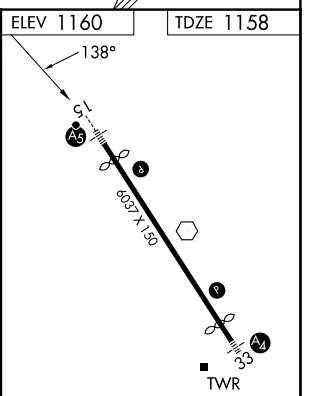

CATEGORY	A	B	C	D
S-15	1700-1 542 (600-1)		1700-1⅛ 542 (600-1⅛)	
CIRCLING	1700-1 540 (600-1)		1700-1⅝ 540 (600-1⅝)	1720-2 560 (600-2)
ZUTMA FIX MINIMUMS #				
S-15	1520-1 362 (400-1)			
CIRCLING	1580-1 420 (500-1)	1660-1 500 (500-1)	1660-1½ 500 (500-1½)	1720-2 560 (600-2)

HIRL Rwy 15-33 L
REIL Rwys 15 and 33 L

NC-3, 03 SEP 2026 to 01 OCT 2026
NC-3, 03 SEP 2026 to 01 OCT 2026