

RNAV (GPS) RWY 16

WAAS CH 99069 W16A	APCH CRS 158°	Rwy Idg 3914 TDZE 328 Arpt Elev 330
--	-------------------------	--

[USA]

MAKS AAF (FORT POLK) (KPOE)

RNP APCH - GPS

RADAR required for arrivals at CATVO.



T For uncompensated Baro-VNAV systems, LNAV/VNAV not authorized below -15°C or above 54°C .
When control tower is closed, increase vis to 1 mile.

MISSED APPROACH: Climb to 2000 direct CATVO and hold.


ATIS 134.85 282.2	APP CON 123.7 261.3	TOWER 41.5 119.0 (CTAF) 257.75	GND CON 121.8 239.25	ASR/PAR
----------------------	------------------------	--------------------------------------	-------------------------	---------

NoPT for arrival at COCOS on V212 eastbound.


When R-3803C is active, procedure entry from
COCOS not authorized. Expect RADAR vectors to final.

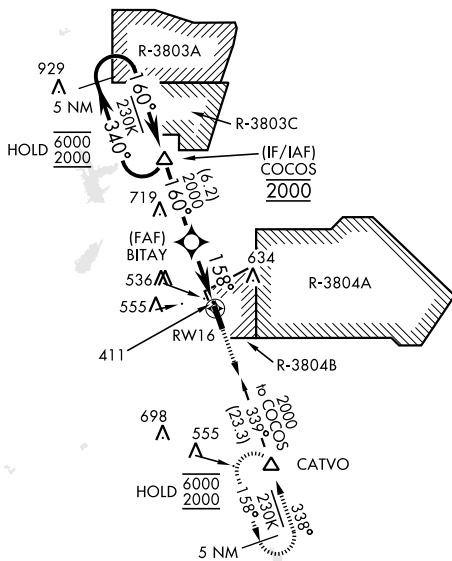

ELEV	330		TDZE	328
------	-----	--	------	-----

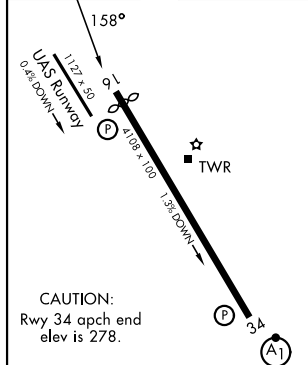

HIRL Rwy 16-34
REIL Rwy 16-34

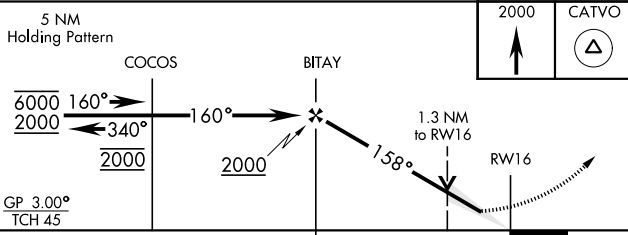

CATEGORY	A	B	C	D
LPV DA	611-7 $\frac{1}{8}$	283	(300-7 $\frac{1}{8}$)	
RNAV/VNAV DA	800-13 $\frac{1}{8}$	472	(500-13 $\frac{1}{8}$)	
RNAV MDA	800-1	472 (500-1)	800-13 $\frac{1}{8}$ 472	(500-13 $\frac{1}{8}$)
CIRCLING	880-1	550 (600-1)	880-1 $\frac{1}{2}$ 550 (600-1 $\frac{1}{2}$)	940-2 610 (700-2)