

LOC/DME I-ROF
111.15
Chan **48(Y)**

APP CRS
328°

Rwy Ldg
TDZE **705**
Apt Elev **712**

LOC RWY 33
AURORA MUNI (ARR)


⚠

For inop ALS, increase S-LOC 33 Cats C and D visibility to 1¼ SM and EPABE FIX minimums S-LOC 33 Cats C and D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 on heading 146° and JOT VOR/DME R-347 to VAINS INT/JOT 13 DME and hold, continue climb-in-hold to 3000.

ATIS 125.85	CHICAGO APP CON 133.5 349.0	AURORA TOWER★ 120.6 (CTAF) 0	GND CON 121.7
-----------------------	---------------------------------------	--	-------------------------

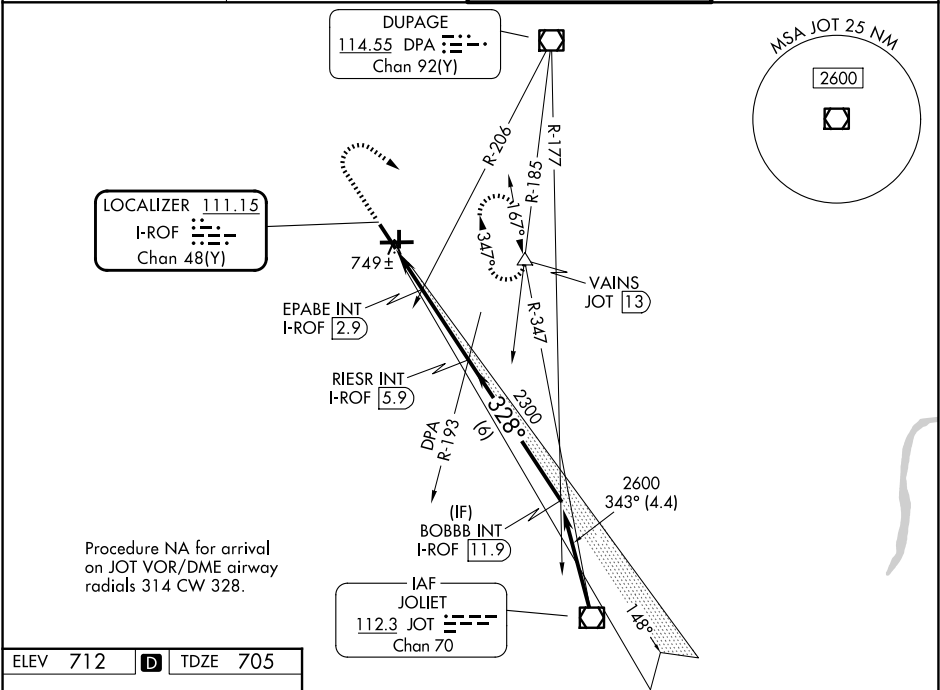

Procedure NA for arrival on JOT VOR/DME airway radials 314 CW 328.

ELEV 712 D TDZE 705

HIRL Rws 15-33 and 9-27
MIRL Rws 18-36
REIL Rws 15, 18, 27, and 36

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

1400 ↑	3000 hdg 146°	JOT R-347 △	VAINS	RIESR INT I-ROF 5.9	BOBBB INT I-ROF 11.9				
CATEGORY		A		B		C		D	
S-LOC 33		1320-½		615 (700-½)		1320-⅓		615 (700-⅓)	
CIRCLING		1320-1		608 (700-1)		1320-⅜		1340-2	
						608 (700-⅜)		628 (700-2)	
EPABE FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED)									
S-LOC 33		1080-½		375 (400-½)		1080-⅝		375 (400-⅝)	
CIRCLING		1220-1		508 (600-1)		1300-1½		1340-2	
						588 (600-½)		628 (700-2)	