



WAAS CH 61212 W13A	APP CRS 129°	Rwy Ldg TDZE Apt Elev
		5500 2020 2032

RNAV (GPS) RWY 13

WINNER RGNL (ICR)

RNP APCH - GPS.	
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Baro-VNAV and VDP NA when using VTN altimeter setting. When local altimeter setting not received, use VTN altimeter setting: increase LPV DA to 2451 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 2637 feet and all visibilities ¼ SM; increase all MDAs 200 feet and LNAV visibility Cat C ½ SM and Circling visibility Cats B/C ¾ SM.	MISSED APPROACH: Climb to 4100 direct AGUFY and hold.

ASOS 126.775	MINNEAPOLIS CENTER 125.1 269.1	GCO 121.725	UNICOM 122.8 (CTAF) 0
------------------------	--	-----------------------	---------------------------------

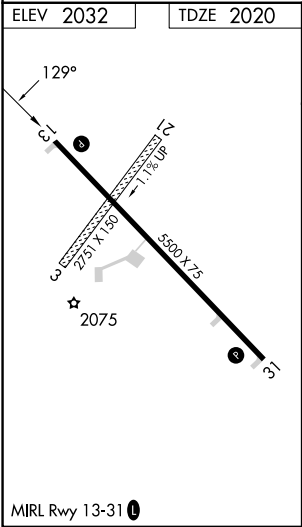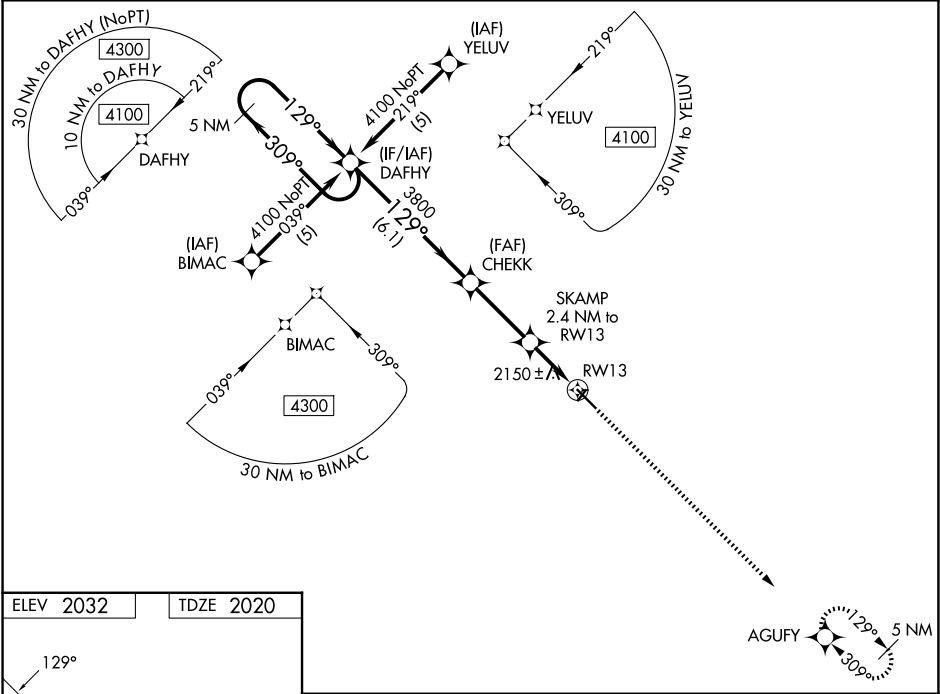

	5 NM Holding Pattern	DAFHY	CHEKK	SKAMP 2.4 NM to RWY13	4100	AGUFY
	4100	309°	129°	1.4 NM to RWY13		
	GP 3.00°		3800	2800		
	TCH 38		6.1 NM	3 NM	1 NM	1.4 NM
CATEGORY	A	B	C	D		
LPV DA	2270-1	250 (300-1)		NA		
LNAV/VNAV DA	2456-1½	436 (500-1½)		NA		
LNAV MDA	2480-1	460 (500-1)	2480-1¾ 460 (500-1¾)	NA		
CIRCLING	2580-1 548 (600-1)	2680-1 648 (700-1)	2680-1¾ 648 (700-1¾)	NA		