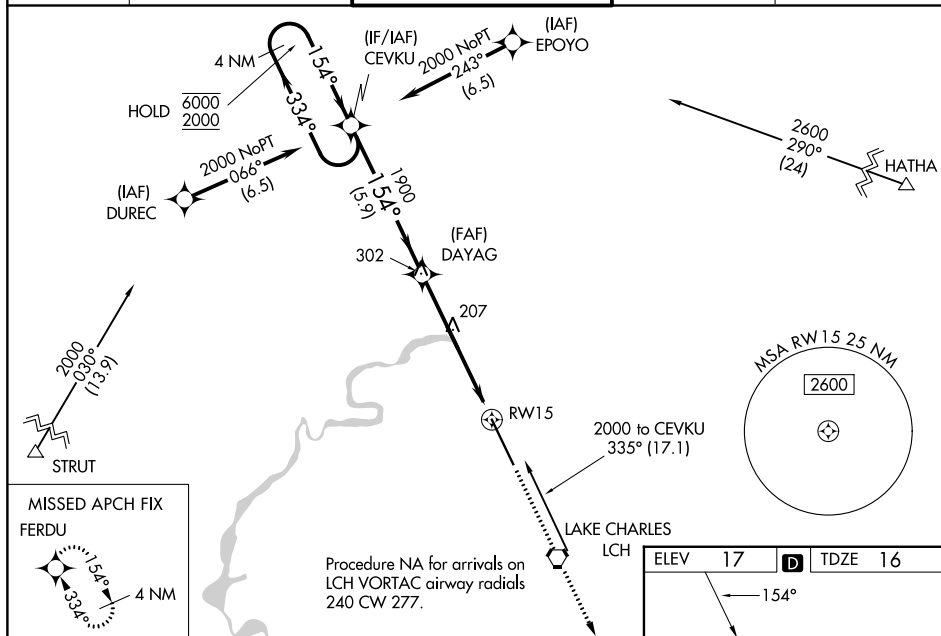
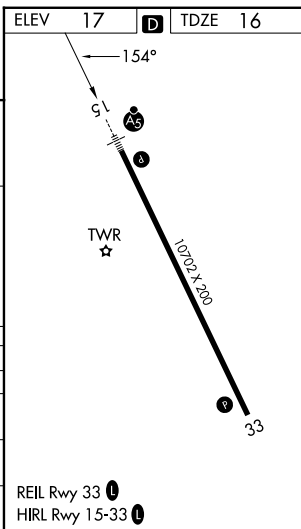


WAAS CH 45502 W15A	APP CRS 154°	Rwy Ldg 10702 TDZE 16 Apt Elev 17
--	------------------------	--

RNAV (GPS) RWY 15
CHENNAULT INTL (CWF)

RNP APCH - GPS  Baro-VNAV and VDP NA when using LCH altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C. When local altimeter setting not received, use LCH altimeter setting: increase LPV DA to 233 feet; increase LNAV/VNAV DA to 524 feet; increase all MDAs 20 feet and LNAV visibility Cats C/D 1/2 SM and Circling visibility Cat D 1/4 SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 3/4 SM. ASR	 MISSED APPROACH: Climb to 2000 direct FERDU and hold.
---	--

ATIS 120.0	LAKE CHARLES APP CON* 119.8 282.3	CHENNAULT TOWER* 124.2 (CTAF) 0 290.4	GND CON 121.65 275.8	UNICOM 122.95
---------------	--------------------------------------	--	-------------------------	------------------

[illegible]

SC-4, 03 SEP 2026 to 01 OCT 2026