ILS or LOC RWY 36
AUBURN UNIVERSITY RGNL (AUO)

LOC/DME I-AUO	APP CRS	Rwy Ldg	5264
110.1	005°	TDZE	759
Chan 38		Apt Elev	777

DME required.

Circling Rwy 29 NA at night. VDP NA when using CSG altimeter setting. When local altimeter setting not received, use CSG altimeter setting and increase S-ILS 36 DA to 1073 feet; increase all MDAs 120 feet and S-LOC 36 visibility Cats C/D ⅜ SM, and Circling visibility Cats C/D ½ SM. Inop table does not apply to S-ILS 36 all Cats. For inop ALS when using CSG altimeter setting, increase S-ILS 36 all Cats visibility to ⅞ SM.

MALSF

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 and on LGC VORTAC R-196 to HESEL/I-AUO 13.8 DME/RADAR and hold.

AWOS-3PT	ATLANTA APP CON ★	AUBURN TOWER ★	GND CON ★	UNICOM
132.575	125.5 323.1	123.875 (CTAF) L	121.625	123.0

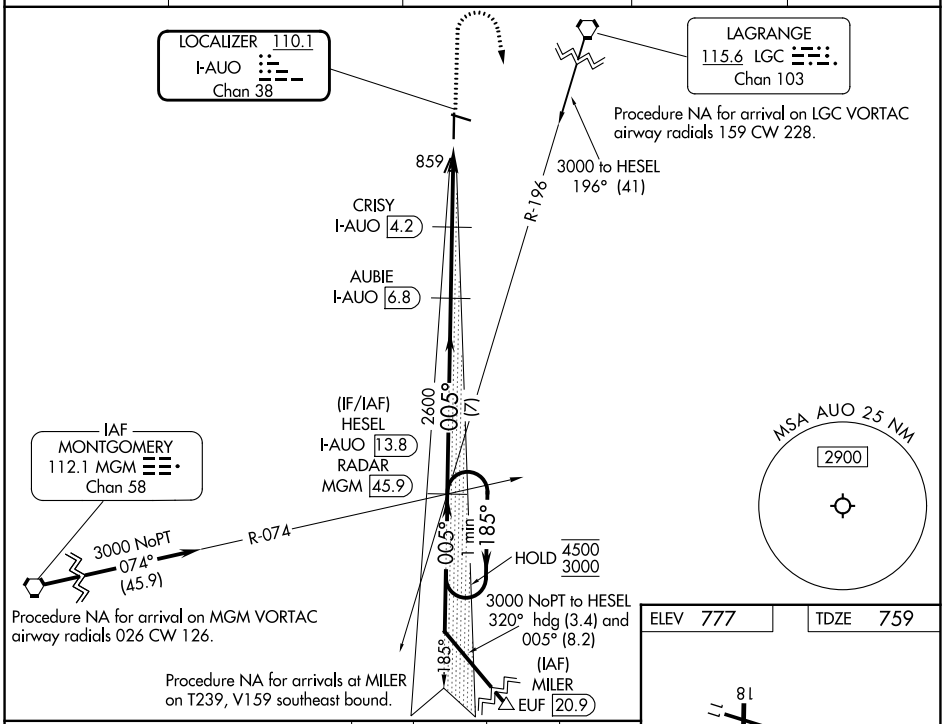

ELEV 777	TDZE 759

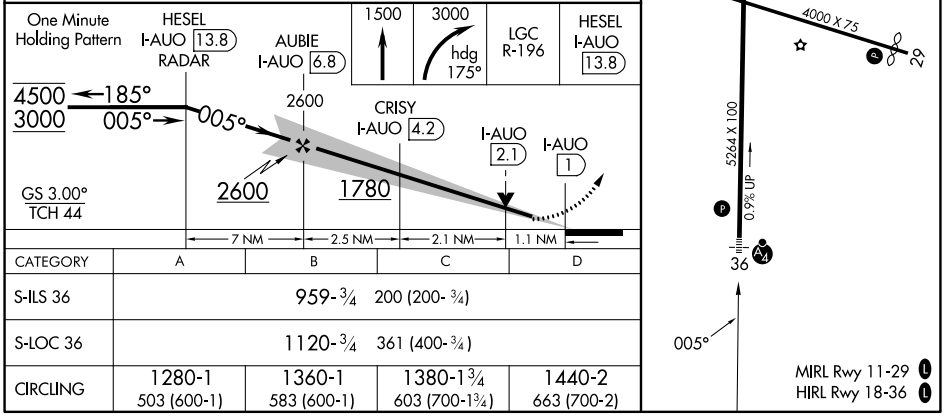

CATEGORY	A	B	C	D
S-ILS 36	959-¾ 200 (200- ¾)			
S-LOC 36	1120-¾ 361 (400-¾)			
CIRCLING	1280-1 503 (600-1)	1360-1 583 (600-1)	1380-1¾ 603 (700-1¾)	1440-2 663 (700-2)

SE-4, 03 SEP 2026 to 01 OCT 2026

SE-4, 03 SEP 2026 to 01 OCT 2026