ILS Z or LOC Z RWY 17

MAJORS (GVT)

LOC/DME I-GVT	APP CRS	Rwy Ldg	8030
110.5	176°	TDZE	534
Chan 42		Apt Elev	535

DME required.

VDP NA when using TRL altimeter setting. When local altimeter setting not received, use TRL altimeter setting and increase S-ILS 17 DA to 797 feet; increase all MDAs 80 feet and S-LOC 17 and Circling visibility Cats C/D/E ¼ SM. Inop table does not apply to S-ILS 17 all Cats and S-LOC 17 Cats A/B. For inop ALS, increase S-LOC 17 Cat E visibility to 1⅜ SM. Autopilot coupled approach NA below 900 feet.

MALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 on heading 109° and BYP VORTAC R-145 to HUNTI INT/BYP 38 DME and hold, continue climb-in-hold to 3000.

AWOS-3	FORT WORTH CENTER	MAJORS TOWER ★	GND CON	UNICOM
133.425	132.025 317.75	118.65 (CTAF) L 385.425	121.7 335.8	122.95

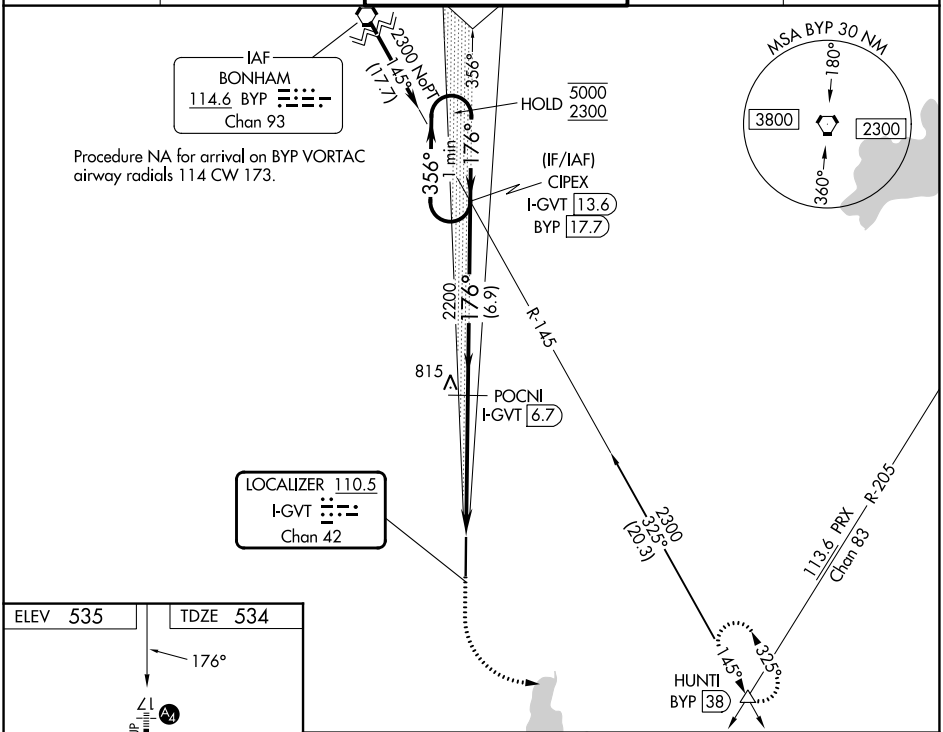

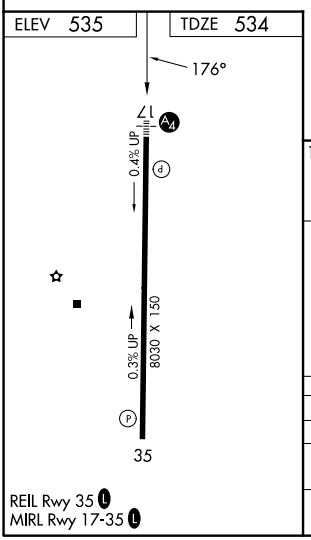

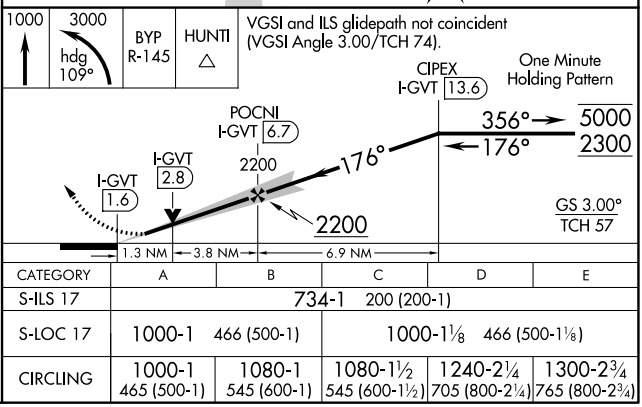

CATEGORY	A	B	C	D	E
S-ILS 17	734-1 200 (200-1)				
S-LOC 17	1000-1 466 (500-1)		1000-1⅛ 466 (500-1⅛)		
CIRCLING	1000-1 465 (500-1)	1080-1 545 (600-1)	1080-1½ 545 (600-1½)	1240-2¼ 705 (800-2¼)	1300-2¾ 765 (800-2¾)

SC-2, 03 SEP 2026 to 01 OCT 2026
SC-2, 03 SEP 2026 to 01 OCT 2026