


WAAS CH 40241 W35A	APP CRS 355°	Rwy Ldg TDZE Apt Elev	6325 1094 1114
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35


HALLIBURTON FLD (DUC)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.	MISSED APPROACH: Climb to 3000 direct CEPAC and hold.
---	---

AWOS-3 119.075	FORT SILL APP CON 118.6 290.375	CLNC DEL 118.4	UNICOM 122.8 (CTAF)
--------------------------	---	--------------------------	-------------------------------

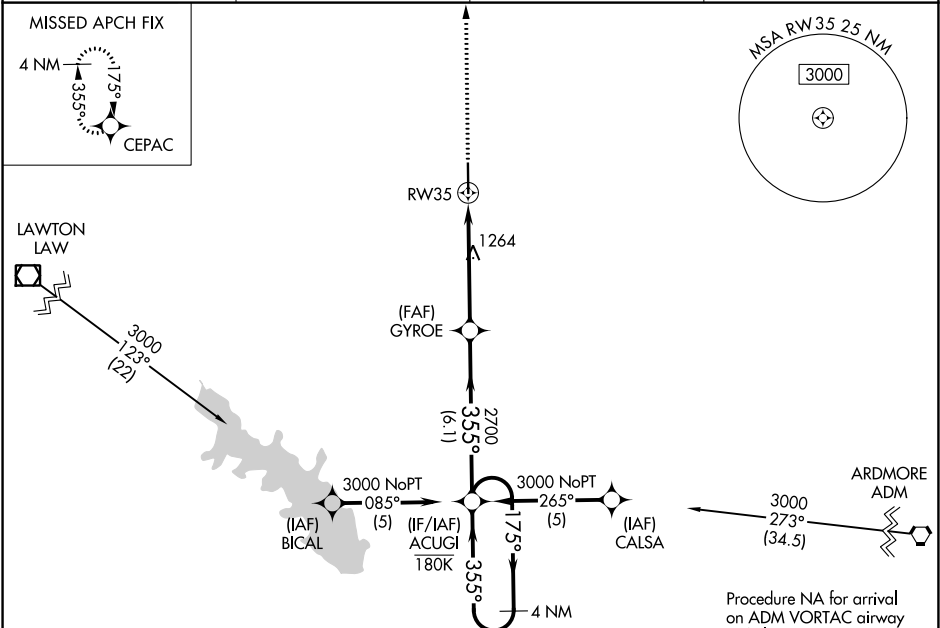

ELEV 1114	D	TDZE 1094
-----------	----------	-----------

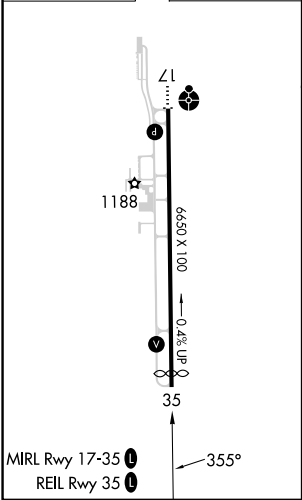

3000

↑

CEPAC

ACUGI

4 NM Holding Pattern

GYROE

2700

175°

3000

355°

1.2 NM

3.7 NM

6.1 NM

GP 3.00°

TCH 42

*LNAV only.

RW35

*1.2 NM to RW35

2700

CATEGORY	A	B	C	D
LPV DA	1294- ³ / ₄		200 (200- ³ / ₄)	
INAV/VNAV DA	1397- ⁷ / ₈		303 (300- ⁷ / ₈)	
INAV MDA	1520-1	426 (500-1)	1520-1 ¹ / ₄	426 (500-1 ¹ / ₄)
CIRCLING	1560-1 446 (500-1)	1580-1 466 (500-1)	1780-1 ³ / ₄ 666 (700-1 ³ / ₄)	1780-2 666 (700-2)