


WAAS CH 93932 W01A	APP CRS 007°	Rwy Ldg TDZE Apt Elev	8001 1387 1409
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 1
BEECH FACTORY (BEC)

Baro-VNAV NA when using Wichita Dwight D Eisenhower Ntl altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Obtain local altimeter setting on CTAF; when not received, use Wichita Dwight D Eisenhower Ntl altimeter setting and increase all DA 36 feet and all MDA 40 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility 1/8 mile, LNAV Cat C and D and Circling Cat C and D visibility 1/4 mile.

MISSED APPROACH:
Climb to 3000 direct DOLBE and hold.

AWOS-3PT 119.45	WICHITA APP CON 134.8 269.1	BEECH TOWER ★ 126.8 (CTAF) 0 313.6	GND CON 121.7	UNICOM 122.95
---------------------------	---------------------------------------	--	-------------------------	-------------------------

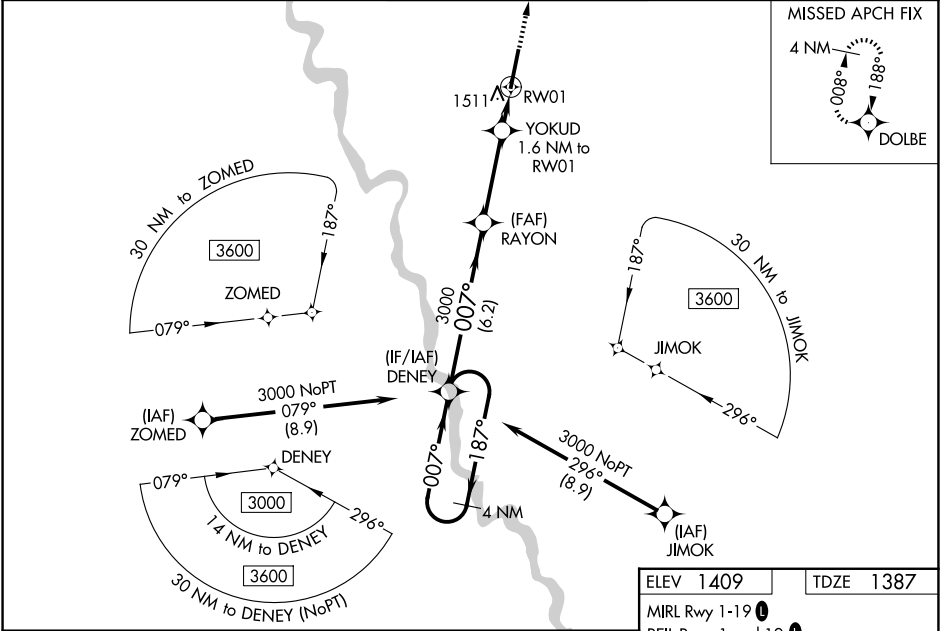

4 NM Holding Pattern

DENEY RAYON

3000 187° 007°

GP 3.00° TCH 45

6.2 NM 3.4 NM 1.6 NM

YOKUD 1.6 NM to RW01


*1920

RW01

3000 DOLBE

*LNAV only

CATEGORY	A	B	C	D
LPV DA	1637-3/4 250 (300-3/4)			
LNAV/VNAV DA	1688-1 301 (300-1)			
LNAV MDA	1780-1 393 (400-1)	1780-1 1/8 393 (400-1 1/8)		
CIRCLING	1820-1 411 (500-1)	2120-1 711 (800-1)	2120-2 711 (800-2)	2120-2 1/4 711 (800-2 1/4)

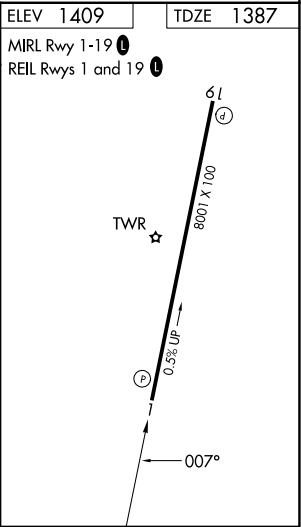

NC-2, 03 SEP 2026 to 01 OCT 2026

NC-2, 03 SEP 2026 to 01 OCT 2026