RNAV (GPS) RWY 4

CLOVIS RGNL (CVN)

WAAS	APP CRS	Rwy Ldg	7200
CH 97300	037°	TDZE	4205
W04A		Apt Elev	4216

RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 49°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM. Circling NA to Rwy 8 and 26.

MALSR

MISSED APPROACH: Climb to 6000 direct RIMKE and hold.

AWOS-3PT	CANNON APP CON	UNICOM
135.375	118.425 352.1	122.8 (CTAF) L

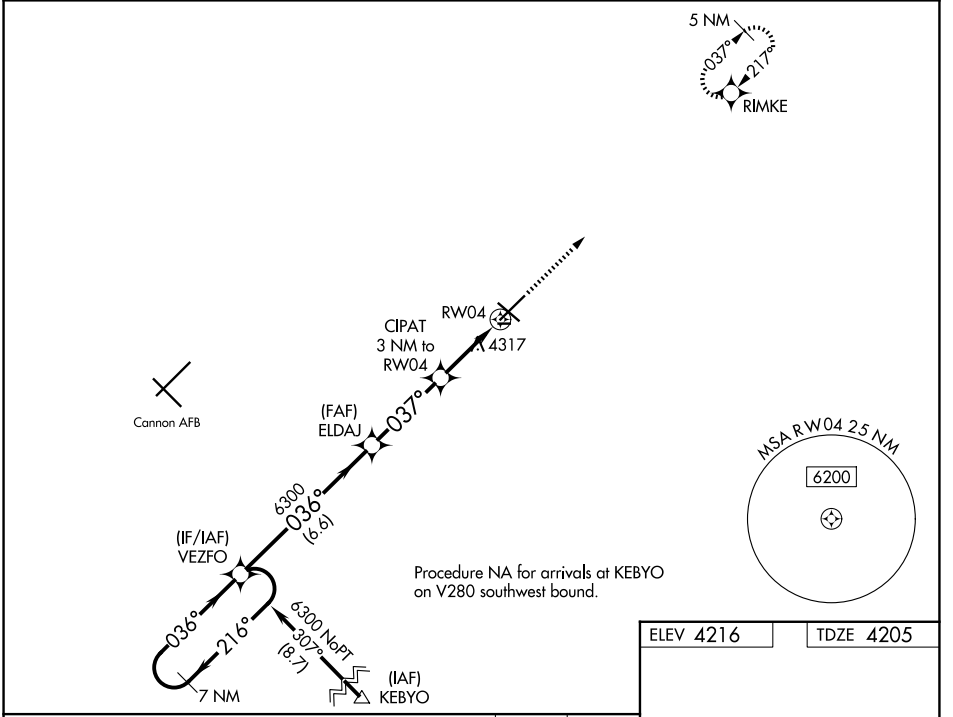

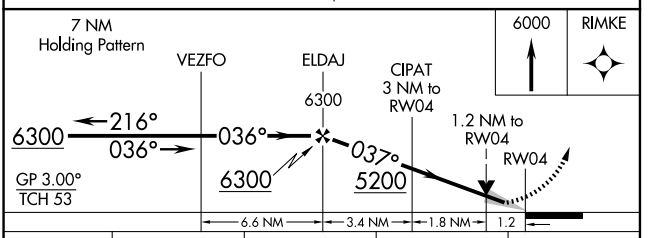

CATEGORY	A	B	C	D
LPV DA	4405-½	200 (200-½)		
LNAV/VNAV DA	4455-½	250 (300-½)		
LNAV MDA	4640-½	435 (500-½)	4640-¾	435 (500-¾)
CIRCLING	4680-1	464 (500-1)	4700-1½ 484 (500-1½)	4820-2 604 (700-2)

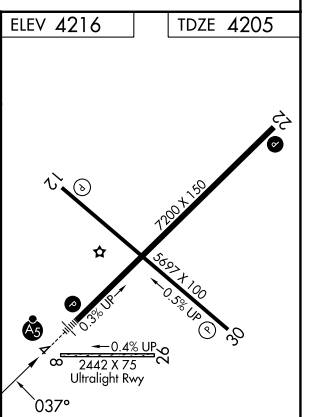

SW-1, 03 SEP 2026 to 01 OCT 2026
SW-1, 03 SEP 2026 to 01 OCT 2026