RNAV (GPS) RWY 13

RANGE RGNL (HIB)

WAAS	APP CRS	Rwy Ldg	6758
CH 69222	130°	TDZE	1354
W13A		Apt Elev	1354

RNP APCH - GPS.

T A -40°C

Baro-VNAV and VDP NA when using Eveleth altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Eveleth altimeter setting and increase LPV DA to 1640 feet; increase LNAV/VNAV DA to 1766 feet and all visibilities ⅛ SM. Increase all MDAs 40 feet and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat C ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 SM. For inop ALS when using Eveleth altimeter setting, increase LPV all Cats visibility to ⅞ SM, LNAV/VNAV all Cats to 1⅛ SM, LNAV Cat C/D to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 3500 direct CEKSA and hold.

ASOS	DULUTH APP CON	UNICOM
126.425	125.45 233.7	123.0 (CTAF) L

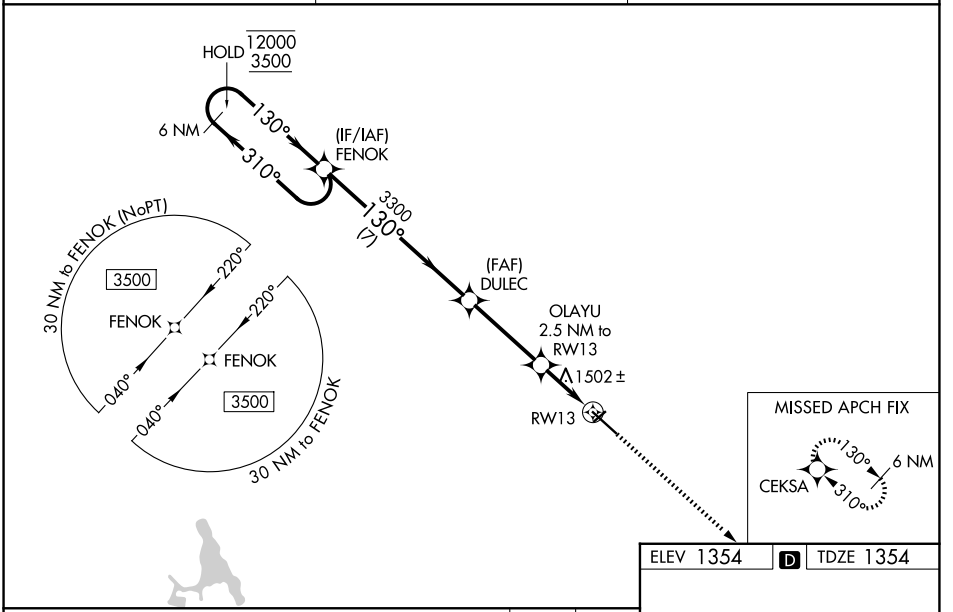

ELEV 1354 D TDZE 1354

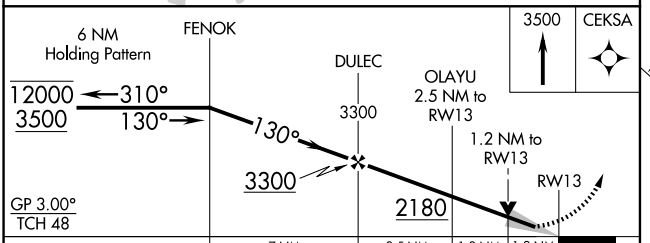

CATEGORY	A	B	C	D
LPV DA	1604-½ 250 (300-½)			
LNAV/VNAV DA	1730-⅝ 376 (400-⅝)			
LNAV MDA	1800-½ 446 (500-½)		1800-⅞ 446 (500-⅞)	
CIRCLING	1900-1 546 (600-1)		1920-1½ 566 (600-1½)	1980-2 626 (700-2)

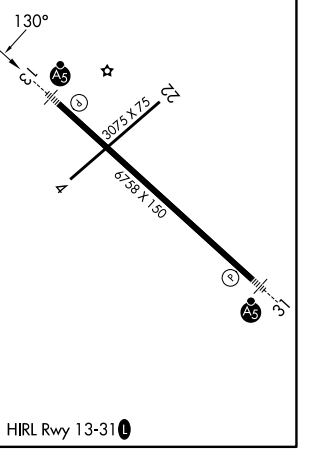

HIRL Rwy 13-31 L

NC-1, 03 SEP 2026 to 01 OCT 2026
NC-1, 03 SEP 2026 to 01 OCT 2026