WAAS CH 65722 W31A	APP CRS 310°	Rwy Ldg 6758 TDZE 1345 Apt Elev 1354

RNAV (GPS) RWY 31
RANGE RGNL (HIB)

RNP APCH - GPS.

T A -40°C Baro-VNAV and VDP NA when using Eveleth altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Eveleth altimeter setting and increase LPV DA to 1581 feet; increase LNAV/VNAV DA to 1643 feet; increase all MDAs 40 feet; and Circling visibility Cat C ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM, LNAV Cat C/D to 1 SM. For inop ALS when using Eveleth altimeter setting, increase LNAV/VNAV all Cats visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 3500 direct FENOK and hold.

ASOS	DULUTH APP CON	UNICOM
126.425	125.45 233.7	123.0 (CTAF) L

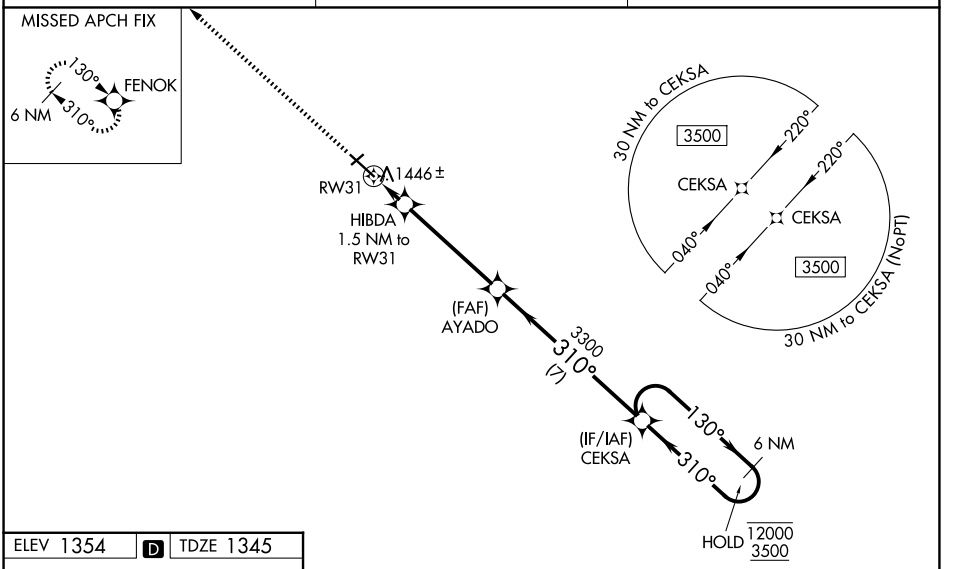

ELEV 1354 D TDZE 1345



HIRL Rwy 13-31 L

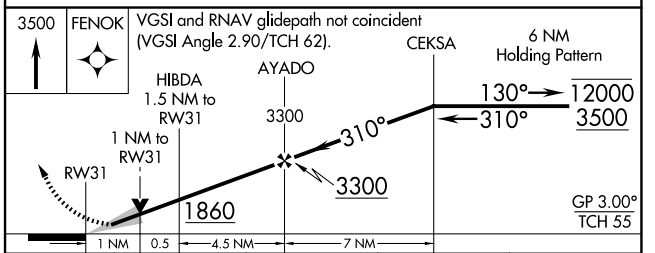

CATEGORY	A	B	C	D
LPV DA	1545-½ 200 (200-½)			
LNAV/VNAV DA	1607-½ 262 (300-½)			
LNAV MDA	1700-½ 355 (400-½)		1700-⅝ 355 (400-⅝)	
CIRCLING	1900-1 546 (600-1)		1920-1½ 566 (600-1½)	1980-2 626 (700-2)

NC-1, 03 SEP 2026 to 01 OCT 2026
NC-1, 03 SEP 2026 to 01 OCT 2026