

WAAS CH 56537 W06A	APP CRS 063°	Rwy Ldg TDZE 722 Apt Elev 722
--	------------------------	---

RNAV (GPS) RWY 6


COLES COUNTY MEML (MTO)

⚠

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Champaign/Urbana altimeter setting and increase all DA 82 feet, increase MDA 100 feet, increase LPV, LNAV/VNAV all Cats, LNAV Cats C/D and Circling Cat D visibility ¼ mile. Baro-VNAV and VDP NA when using Champaign/Urbana altimeter setting. Rwy 6 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Circling NA to Rwys 18 and 36.

MISSED APPROACH:
Climb to 3000 direct NIBIE and hold.

ASOS 118.475	CHAMPAIGN APP CON ★ 132.85 290.225	UNICOM 122.7 (CTAF) 0
------------------------	--	---------------------------------

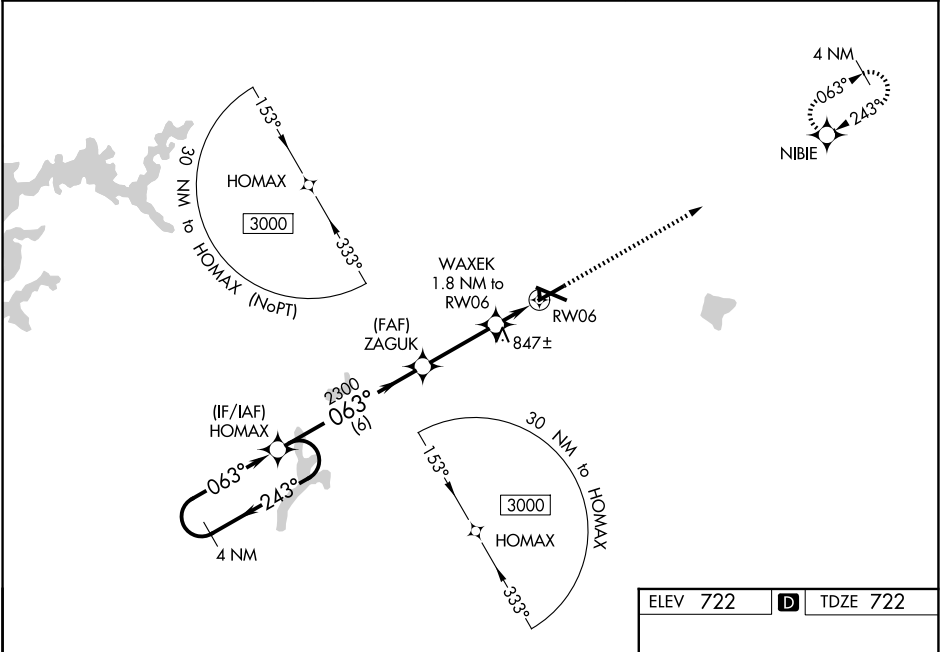

4 NM Holding Pattern

3000 ← 243°
063° →

GP 3.00°
TCH 41

HOMAX

ZAGUK

WAXEK

RW06

3000

2300

1320

1.8 NM to RW06

*1.1 NM to RW06

*LNAV only.

CATEGORY	A	B	C	D
LPV DA	972-7⁄8		250 (300-7⁄8)	
LNAV/VNAV DA	1124-13⁄8		402 (500-13⁄8)	
LNAV MDA	1100-1	378 (400-1)	1100-1½	378 (400-1½)
CIRCLING	1160-1 438 (500-1)	1180-1 458 (500-1)	1240-1½ 518 (600-1½)	1380-2 658 (700-2)

ELEV 722 D TDZE 722

11 1098 X 250
0.4% UP

5799 X 100
0.4% UP

6501 X 130

063°

MIRL Rwy 6-24 0

HIRL Rwy 11-29 0

REIL Rwys 6, 11, and 24 0