



WAAS CH 45704 W13A	APP CRS 135°	Rwy Ldg TDZE 238 Apt Elev 238
--	------------------------	---

RNAV (GPS) RWY 13

HESLER/NOBLE FLD (LUL)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2000 direct IPAXE and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV ▲ NA below -15°C or above 54°C.	

AWOS-3PT 119.275	HOUSTON CENTER 126.8 327.8	UNICOM 123.05 (CTAF) 0
----------------------------	--------------------------------------	----------------------------------

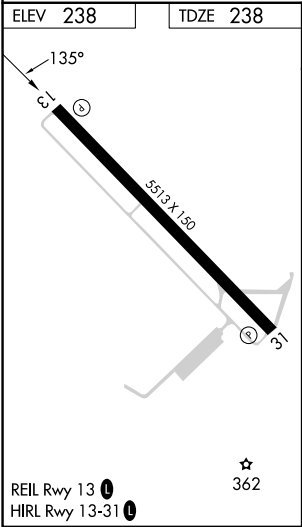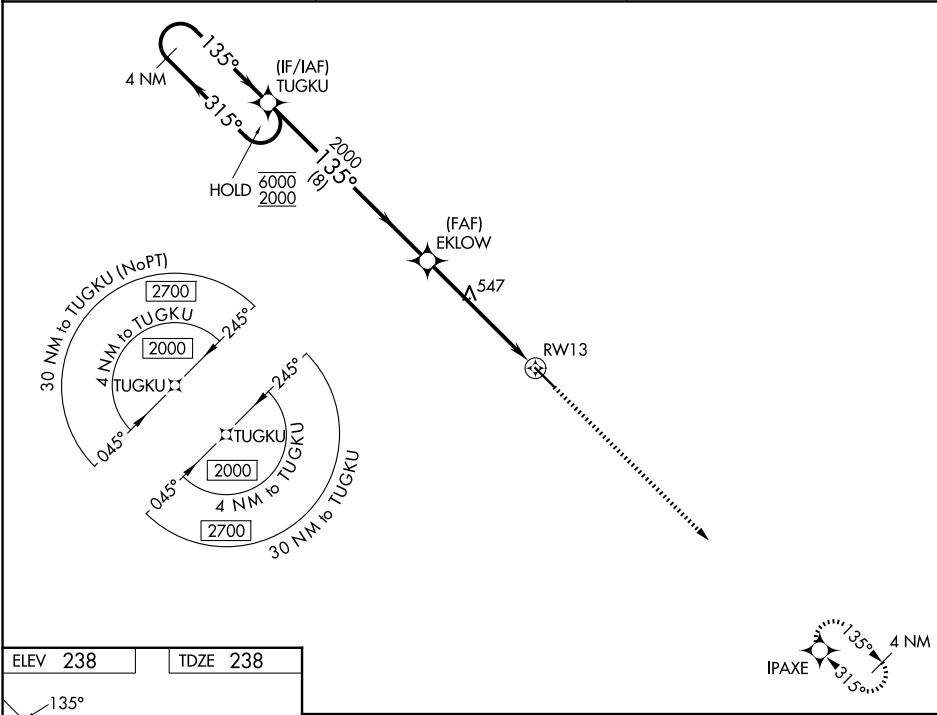

4 NM Holding Pattern				2000	IPAXE
TUGKU				EKLOW	
6000 ← 315°				2000	1.7 NM to RWY13
2000 → 135°				2000	
GP 3.00°					
TCH 40					
8 NM				3.8 NM	1.7 NM
CATEGORY	A	B	C	D	
LPV DA	488-1		250 (300-1)		
LNAV/VNAV DA	759-1¾		521 (600-1¾)		
LNAV MDA	800-1	562 (600-1)	800-1½ 562 (600-1½)	800-2 562 (600-2)	
CIRCLING	800-1	562 (600-1)	1040-2¼ 802 (900-2¼)	1060-2¾ 822 (900-2¾)	