

WAAS CH 77836 W22A	APP CRS 217°	Rwy Ldg TDZE 1119 Apt Elev 1119
--	------------------------	---

RNAV (GPS) RWY 22



THIEF RIVER FALLS RGNL (TVF)

⚠

Baro-VNAV and VDP NA when using Crockston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crockston altimeter setting and increase all DA 82 feet and all MDA 100 feet. Increase LPV all Cats visibility to 1½ mile and LNAV/VNAV all Cats visibility to 1¼ mile.

MISSED APPROACH:
Climb 3300 direct
BOOMS and hold.

AWOS-3PT 119.025	MINNEAPOLIS CENTER 132.15 269.6	UNICOM 122.8 (CTAF) 1
----------------------------	---	---------------------------------

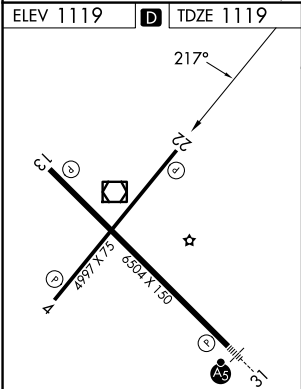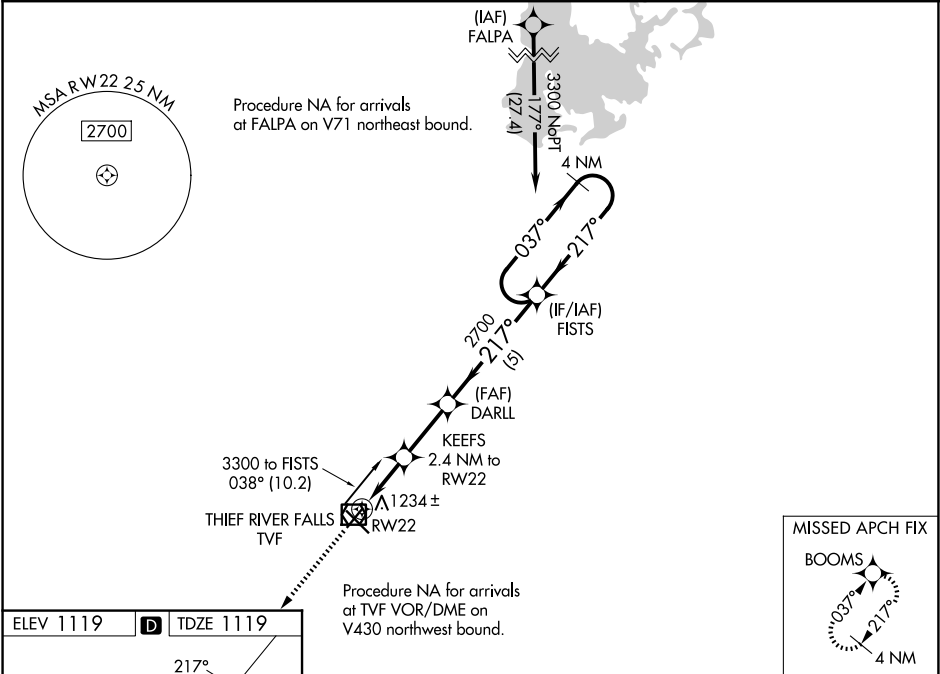

HIRL Rwy 13-31 1
MIRL Rwy 4-22 1
REIL Rwy 4, 13 and 22 1

ELEV 1119 D TDZE 1119		3300 BOOMS VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 34).			
217°		FISTS 4 NM Holding Pattern			
*LNAV only		DARLL 2700			
*1.1 NM to RW22		KEFFS 2.4 NM to RW22			
1.1 NM		1920*			
1.3 NM		GP 3.00°			
2.4 NM		TCH 40			
5 NM					
CATEGORY	A	B	C	D	
LPV DA	1369-1	250 (300-1)	NA		
LNAV/VNAV DA	1396-1	277 (300-1)	NA		
LNAV MDA	1500-1	381 (400-1)	NA		
CIRCLING	1540-1 421 (500-1)	1580-1 461 (500-1)	NA		