

LOC/DME I-FLD 108.3 Chan 20	APP CRS 002°	Rwy Ldg 5941 TDZE 795 Apt Elev 808
---	------------------------	---

LOC RWY 36
FOND DU LAC COUNTY (FLD)

DME required. Radar required for Procedure Entry at ERAGE.

▼ **▲** **NA** Circling Rwy 9, 27 NA at night. For inop ALS, increase S-LOC 36 Cat A/B visibility to 1 SM, and Cat C/D to 1/2 SM. When local altimeter setting not received, use Oshkosh altimeter setting: increase all MDA 40 feet and increase Circling Cat C/D visibility 1/2 SM. VDP NA when using Oshkosh altimeter setting. For inop ALS when using Oshkosh altimeter setting, increase S-LOC 36 Cat A/B visibility to 1 SM.

MALS

MISSED APPROACH
Climb to 2000 then
climbing left turn to
3000 direct OSH
VORTAC and hold.

ASOS


134.0

MILWAUKEE APP CON

127.0 263.075

UNICOM

123.05 (CTAF) L

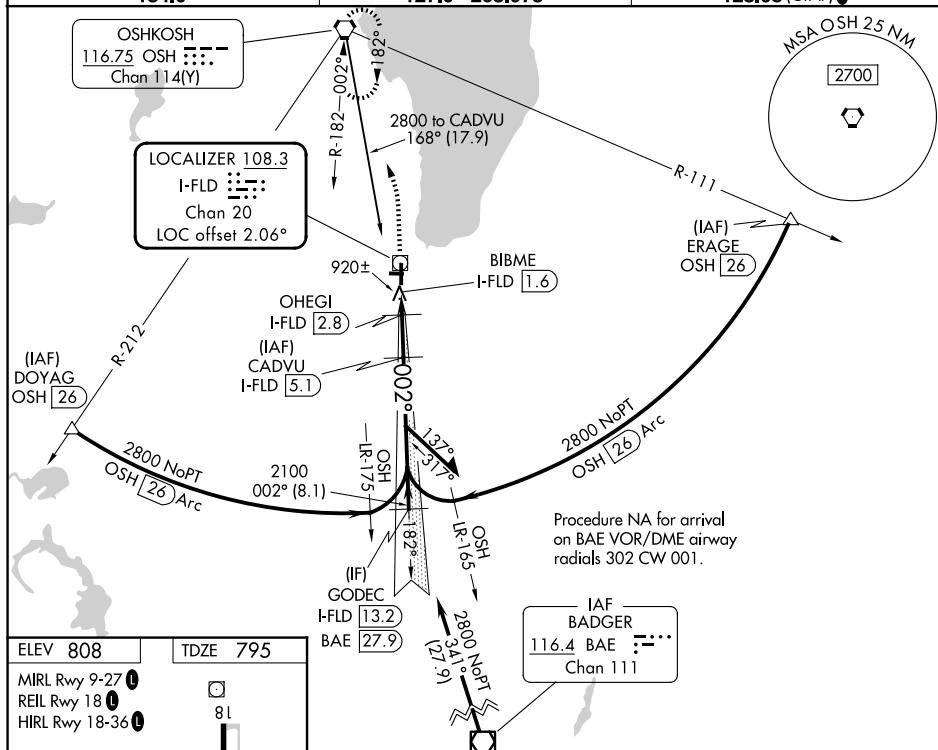

2000 3000 OSH

Use I-FLD DME when on the localizer course.

CADVU
I-FLD [5.1]

Remain within 15 NM

182°

2800

002°

*1400 using Oshkosh altimeter setting.

*1360

≤ 3.00°
TCH 55

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 35).

CATEGORY	A	B	C	D
S-LOC 36	1180-3/4 385 (400-3/4)			
CIRCLING	1400-1 592 (600-1)	1520-2 712 (800-2)	1520-2 712 (800-2 1/4)	