

WAAS CH 63038 W36A	APP CRS 356°	Rwy Ldg 5513 TDZE 1304 Apt Elev 1304
--	------------------------	---

RNAV (GPS) RWY 36



MITCHELL MUNI (MHE)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Huron Rgnl altimeter setting and increase LPV DA to 1643, and LNAV/VNAV DA to 1697. Increase all MDA 100 feet. Increase LPV visibility, all Cats, to 1½ mile, LNAV/VNAV visibility, all Cats, and LNAV visibility Cats C/D to 1¾ mile and increase Circling Cat C visibility to 1¾ mile. Baro-VNAV and VDP NA when using Huron Rgnl altimeter setting.

MISSED APPROACH:
Climb to 3500 direct WUNTI and hold.

ASOS 124.175	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

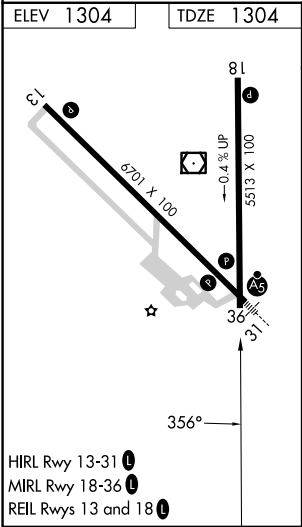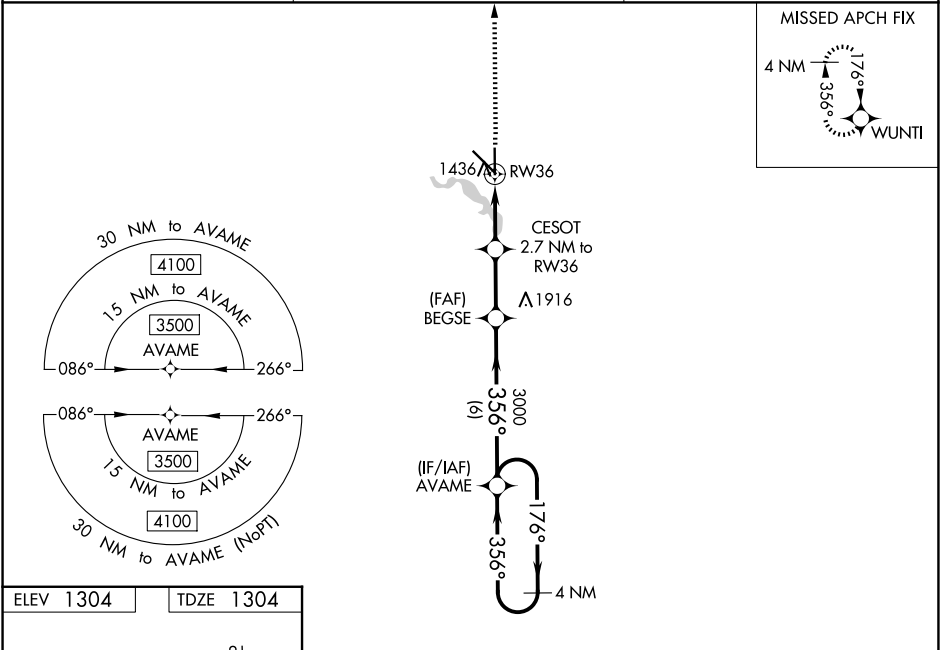

3500 WUNTI

*LNAV only

RW36

CESOT
2.7 NM to RW36

BEGSE

3000

356°

356°

3500

4 NM Holding Pattern

GP 3.00°
TCH 50

1.1 NM	1.6 NM	2.5 NM	6 NM	
CATEGORY	A	B	C	D
LPV DA	1554-1 250 (300-1)			
LNAV/VNAV DA	1608-1 304 (400-1)			
LNAV MDA	1700-1	396 (400-1)	1700-1½	396 (400-1½)
CIRCLING	1740-1 436 (500-1)	1760-1 456 (500-1)	1820-1½ 516 (600-1½)	1860-2 556 (600-2)