

26190




RNAV (GPS) RWY 1
AMES MUNI (AMW)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). For inop ALS, increase LPV all Cts visibility to ½ SM, LNAV/VNAV all Cts visibility to 1½ SM, LNAV Cts A/B visibility to 1 SM, and LNAV Cts C visibility to 1¾ SM.




MISSED APPROACH:
Climb to 3000 direct
FULE and hold.

ASOS 132.025	DES MOINES APP CON 123.9 307.15	CLNC DEL 126.0	UNICOM 122.7 (CTAF) 0
------------------------	---	--------------------------	---------------------------------

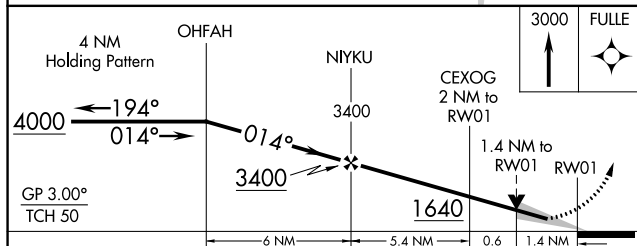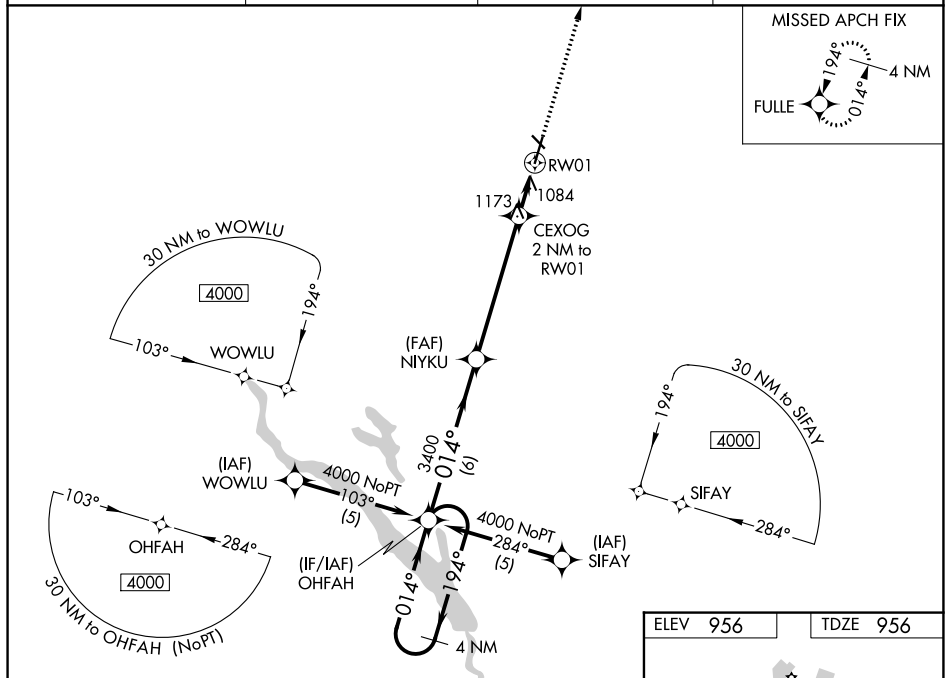

CATEGORY		A	B	C	D
LPV	DA	1261 ^{-3/4} 305 (400 ^{-3/4})			NA
RNAV/ VNAV	DA	1364-1 408 (500-1)			NA
RNAV	MDA	1440 ^{-3/4} 484 (500 ^{-3/4})		1440-1 484 (500-1)	NA
CIRCLING		1440-1 484 (500-1)	1460-1 504 (600-1)	1640-2 684 (700-2)	NA

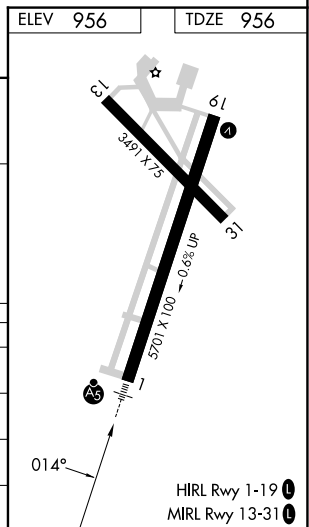

AMES MUNI (AMW)
RNAV (GPS) RWY 1

NC-3, 03 SEP 2026 to 01 OCT 2026