

WAAS
CH **69509**
W27A

APP CRS
275°

Rwy Ldg
TDZE **455**
Apt Elev **461**

RNAV (GPS) RWY 27
CRAWFORD COUNTY (RSV)


RNP APCH-GPS.

▼
▲

For uncompensated Baro-VNAV systems,
LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH: Climb to
3000 direct PULOY and hold.

AWOS-3 120.50	HULMAN APP CON 135.35 339.8	UNICOM 123.0 (CTAF) 0
-------------------------	---------------------------------------	---------------------------------

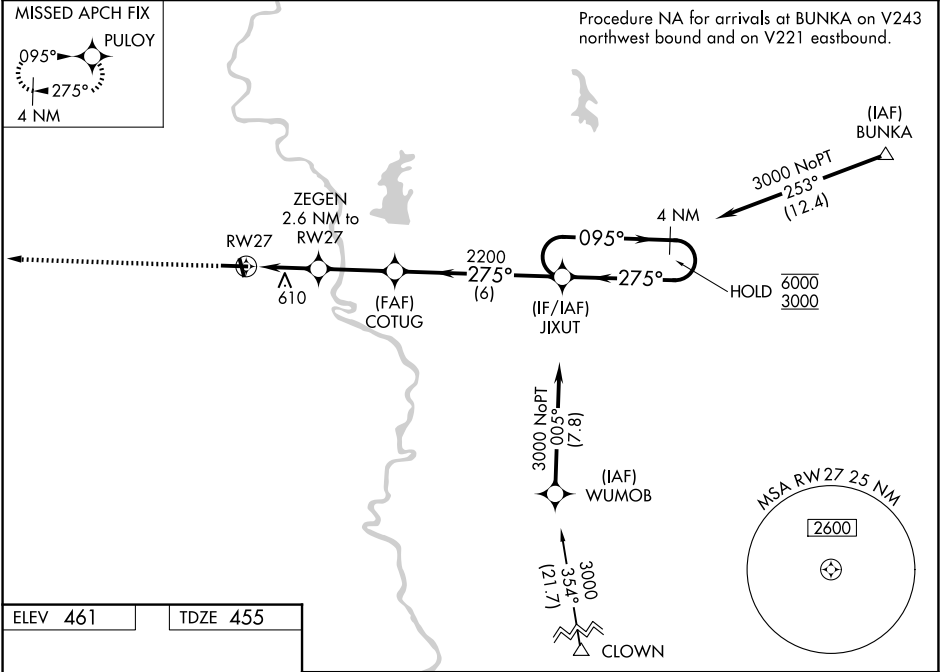

ELEV 461	TDZE 455
-----------------	-----------------

3000

PULOY

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 25).

5108 X 100

3398 X 75

35

275°

L1

L2

1.1 NM

1.5 NM

2.7 NM

6 NM

1320

2200

2200

6000

3000

GP 3.00°

TCH 45

CATEGORY	A	B	C	D
LPV DA	705-1 250 (300-1)			
LNAV/VNAV DA	845-1¼ 390 (400-1¼)			
LNAV MDA	840-1 385 (400-1)		840-1⅛ 385 (400-1⅛)	
CIRCLING	940-1 479 (500-1)	1080-1 619 (700-1)	1120-1¾ 659 (700-1¾)	1180-2¼ 719 (800-2¼)