
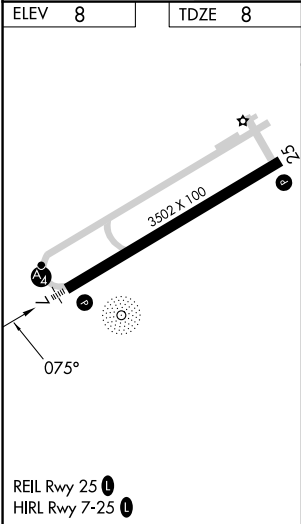


|                                        |                        |                                         |                                     |
|----------------------------------------|------------------------|-----------------------------------------|-------------------------------------|
| WAAS<br>CH <b>86738</b><br><b>W07A</b> | APP CRS<br><b>075°</b> | Rwy Ldg<br>TDZE<br>Apt Elev<br><b>8</b> | <b>3502</b><br><b>8</b><br><b>8</b> |
|----------------------------------------|------------------------|-----------------------------------------|-------------------------------------|

RNAV (GPS) RWY 7  
PROVINCETOWN MUNI (PVC)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |           |                                                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------|
| RNP APCH - GPS.<br>Baro-VNAV and VDP NA when using HYA altimeter setting. Circling Rwy 25 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Inop table does not apply to LPV. For inop ALS when using HYA altimeter setting, increase LPV and LNAV/VNAV all Cnts visibility to ½ SM. When local altimeter setting not received, use HYA altimeter setting: increase LPV DA to 271 feet, increase LNAV/VNAV DA to 331 feet; increase all MDA 80 feet. | MALSF<br> | MISSED APPROACH:<br>Climb to 3000 direct WULGA and hold. |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------|

|                            |                                |                           |                               |               |
|----------------------------|--------------------------------|---------------------------|-------------------------------|---------------|
| AWOS-3PT<br><b>119.275</b> | BOSTON APP CON<br><b>118.2</b> | CLNC DEL<br><b>120.65</b> | UNICOM<br><b>122.8</b> (CTAF) | <b>122.85</b> |
|----------------------------|--------------------------------|---------------------------|-------------------------------|---------------|

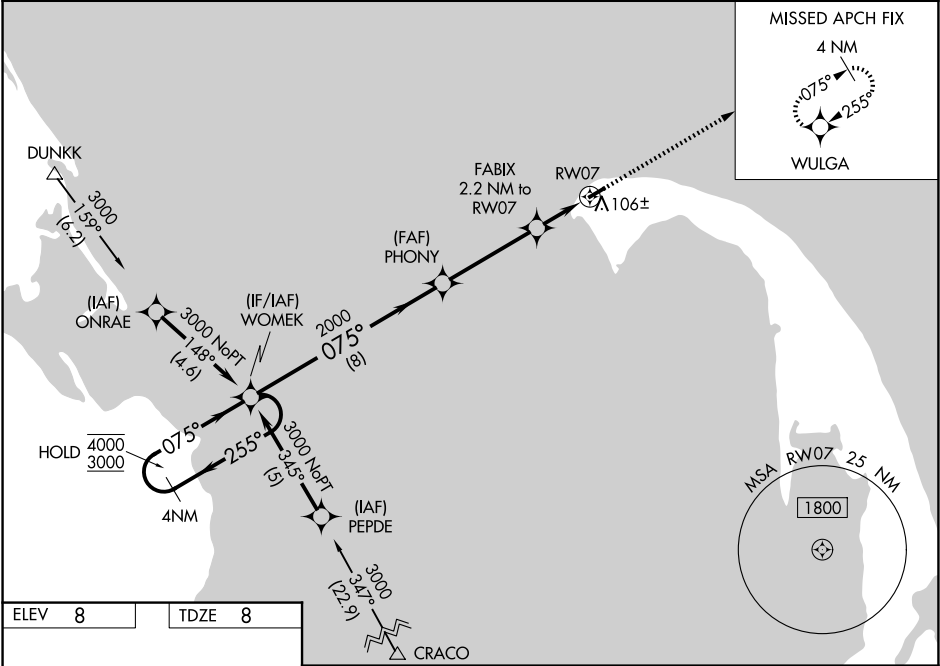

|                      |     |                      |                      |        |   |                |  |
|----------------------|-----|----------------------|----------------------|--------|---|----------------|--|
| 4 NM Holding Pattern |     | WOMEK                |                      | 3000   |   | WULGA          |  |
| 4000 ← 255°          |     | 3000 → 075°          |                      | 075°   |   | 2000           |  |
| GP 3.00°             |     | TCH 40               |                      | PHONY  |   | FABIX          |  |
|                      |     |                      |                      | 2000   |   | 2.2 NM to RW07 |  |
|                      |     |                      |                      | 740    |   | 1 NM to RW07   |  |
|                      |     |                      |                      | 8 NM   |   | 3.9 NM         |  |
|                      |     |                      |                      | 1.2 NM |   | 1 NM           |  |
| CATEGORY             |     | A                    | B                    | C      | D |                |  |
| LPV                  | DA  | 208-¾                | 200 (200-¾)          | NA     |   |                |  |
| LNAV/VNAV            | DA  | 268-¾                | 260 (300-¾)          | NA     |   |                |  |
| LNAV                 | MDA | 360-¾                | 352 (400-¾)          | NA     |   |                |  |
| CIRCLING             |     | 460-1<br>452 (500-1) | 660-1<br>652 (700-1) | NA     |   |                |  |

NE-1, 03 SEP 2026 to 01 OCT 2026

NE-1, 03 SEP 2026 to 01 OCT 2026