# RNAV (GPS) RWY 23
## MOUNT VERNON (MVN)

| WAAS CH 58010 W23A | APP CRS 231° | Rwy Ldg 5572 / TDZE 471 / Apt Elev 480 |
|---|---|---|

RNP APCH - GPS.

T A Baro-VNAV and VDP NA when using ENL altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C or above 54° C. Circling Rwy 15, 33 NA at night. When local altimeter setting not received, use ENL altimeter setting and increase LPV DA to 716 feet; increase LNAV/VNAV DA to 985 feet; increase all MDAs 60 feet and Circling visibilty Cat C ¼ SM. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct GEJTO and hold.

| AWOS-3PT | KANSAS CITY CENTER | UNICOM |
|---|---|---|
| 118.2 | 127.7 351.825 | 123.0 (CTAF) L |

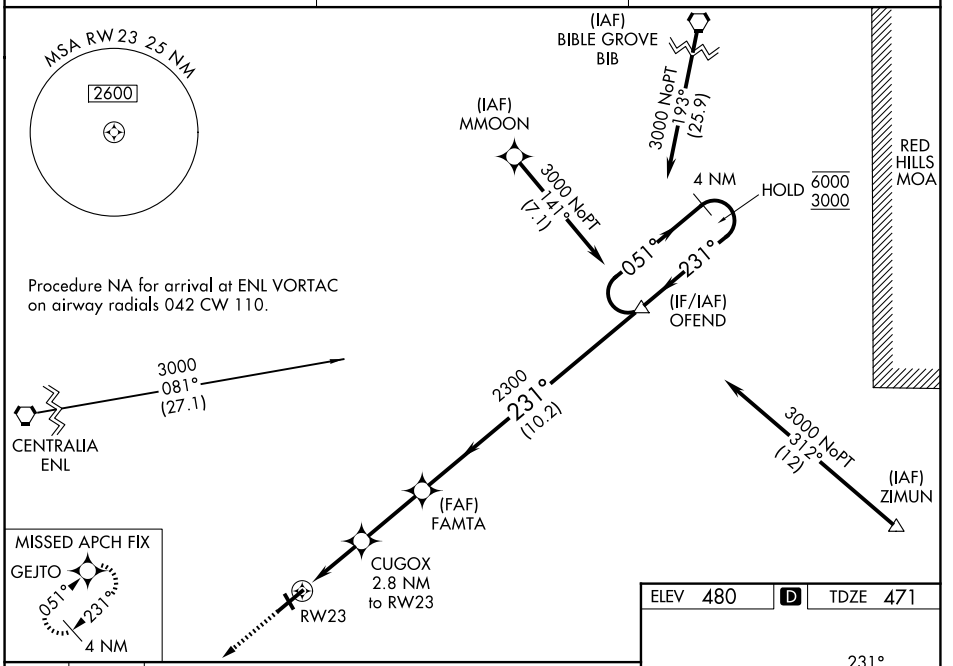


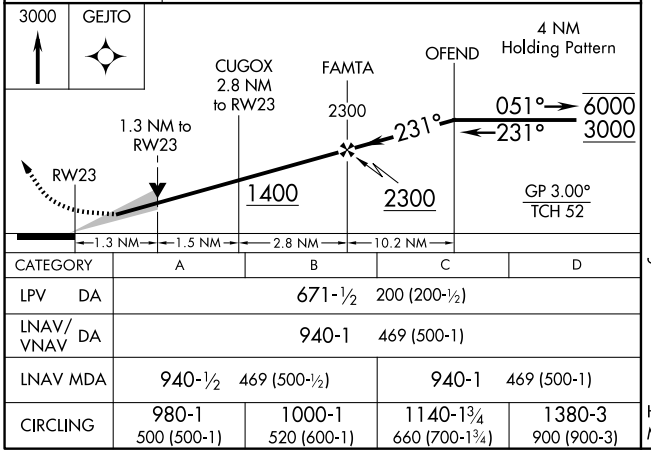


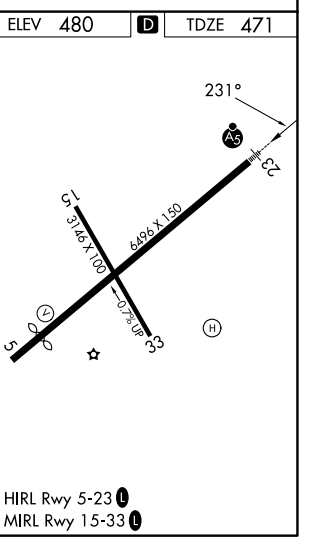


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 671-½ | 200 (200-½) | | |
| LNAV/VNAV DA | 940-1 | 469 (500-1) | | |
| LNAV MDA | 940-½ | 469 (500-½) | 940-1 | 469 (500-1) |
| CIRCLING | 980-1 500 (500-1) | 1000-1 520 (600-1) | 1140-1¾ 660 (700-1¾) | 1380-3 900 (900-3) |

HIRL Rwy 5-23 L
MIRL Rwy 15-33 L



EC-3, 03 SEP 2026 to 01 OCT 2026
EC-3, 03 SEP 2026 to 01 OCT 2026